

# eTrex Summit®

*personal navigator®*

*owner's manual*



© Copyright 2004  
Garmin Ltd. or its subsidiaries  
All Rights Reserved

Garmin International, Inc.  
1200 East 151<sup>st</sup> Street  
Olathe, Kansas 66062 U.S.A.  
Tel. 913/397.8200  
Fax 913/397.8282

Garmin (Europe) Ltd.  
Unit 5, The Quadrangle,  
Abbey Park Industrial Estate  
Romsey, SO51 9DL, U.K.  
Tel. 44/0870.8501241  
Fax 44/0870.8501251

Garmin Corporation  
No. 68, Jangshu 2<sup>nd</sup> Road  
Shijr, Taipei County, Taiwan  
Tel. 886/2.2642.9199  
Fax 886/2.2642.9099

Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express prior written consent of Garmin. Garmin hereby grants permission to download a single copy of this manual and of any revision to this manual onto a hard drive or other electronic storage medium to be viewed and to print one copy of this manual or of any revision hereto, provided that such electronic or printed copy of this manual or revision must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Information in this document is subject to change without notice. Garmin reserves the right to change or improve its products and to make changes in the content without obligation to notify any person or organization of such changes or improvements.

Web Site address: [www.garmin.com](http://www.garmin.com)

Garmin<sup>®</sup>, eTrex Summit<sup>®</sup>, Personal Navigator<sup>®</sup>, TracBack<sup>®</sup>, and MapSource<sup>®</sup> are registered trademarks and WAAS Enabled<sup>™</sup> is a trademark of Garmin Ltd. or its subsidiaries and may not be used without the express permission of Garmin.

## **Preface**

The eTrex Summit is a handheld full-function GPS, electronic compass, and barometric altimeter. The eTrex Summit can track barometric pressure and altitude changes, providing data never before available in such a small package. Using the built-in compass, the eTrex Summit provides you with a reliable heading even while standing still. When moving, the eTrex Summit gives you even more data, including speed, direction of movement, time, distance to destination, and more.

With these basic features, your eTrex Summit can provide one more critical benefit: peace of mind. You'll know where you are, where you've been, and where you're going. And since you'll always know the way back home, you can concentrate on what you set out to do — enjoy the great outdoors.

## **Product Registration**

**Help us better support you by completing your online registration today!**

Connect to our Web site ([www.garmin.com](http://www.garmin.com)) and look for the Product Registration link on the home page. Your unit's serial number is in the battery compartment.

**Serial Number**

--	--	--	--	--	--	--	--

Thank you for choosing the Garmin eTrex Summit. If you have any questions or comments regarding the use of the eTrex Summit you can visit our Web site or contact our Product Support Department M-F, 8:00-5:00 CST (except holidays) at 1-800-800-1020.

## **Introduction**

### **Product Registration**

# Introduction

## Table of Contents

<b>INTRODUCTION</b> .....	<b>I-XII</b>
Product Registration .....	i
Table of Contents .....	ii
FCC Compliance .....	iii
Warnings and Cautions .....	iv-v
Consumer Limited Warranty .....	vi
Software License Agreement .....	vii
Maintenance .....	viii
GPS Cleaning .....	viii
Lens Cleaning .....	viii
Storage .....	viii
Water Immersion .....	viii
Features .....	ix
eTrex Summit Description .....	x
Buttons .....	xi
Battery Installation .....	xii
<b>GETTING STARTED</b> .....	<b>1-12</b>
Here We Go .....	1
Calibrating the Compass .....	2
Page Basics .....	3-8

Let the Fun Begin .....	9
Make Yourself at Home .....	10
Follow the Pointer .....	11
You've Made It! .....	12

<b>REFERENCE</b> .....	<b>13-53</b>
SkyView Page .....	13
Advanced SkyView Page .....	14
Map Page .....	15
Pointer Page .....	16-18
Trip Computer Page .....	19-20
Options .....	19
Trip Computer Data Fields .....	20
Elevation Page .....	21-24
Options .....	21-23
Data Fields .....	24
Menu Page .....	25-39
Mark Waypoint Page .....	25-26
Waypoints Page .....	27
Review Waypoint Page .....	28-30
Hunt/Fish and Sun/Moon Pages .....	31
Project Waypoint Page .....	32
Routes Page .....	33-35
Track Log Page .....	36-39
Calibration Page .....	40

Setup Page .....	41-53
Time Page .....	41-42
Display and Units Pages .....	43
Map Datums .....	44
Dist/Speed and Elevation/VSPD Units... ..	45
Units Page .....	46
Interface Page .....	47
Heading Page .....	48-49
North Reference .....	50
System Page .....	51-53

<b>APPENDICES</b> .....	<b>54-62</b>
Appendix A - Specifications .....	54
Appendix B - What is GPS? .....	55
Appendix C - What is WAAS? .....	56
Appendix D - FAQ .....	57
Appendix E - Accessories .....	58-59
Appendix F - Wiring Diagram .....	60
Appendix G - Troubleshooting .....	61
Appendix H - Reception Tips .....	62

<b>INDEX</b> .....	<b>63-64</b>
--------------------	--------------

The eTrex Summit complies with Part 15 of the FCC interference limits for Class B digital devices FOR HOME OR OFFICE USE. These limits are designed to provide more reasonable protection against harmful interference in a residential installation and are more stringent than “outdoor” requirements.

Operation of this device is subject to the following conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The eTrex Summit does not contain any user-serviceable parts. Repairs should only be made by an authorized Garmin service center. Unauthorized repairs or modifications could result in permanent damage to the equipment, and void your warranty and your authority to operated this device under Part 15 regulations.

## Introduction

### FCC Compliance



# Introduction

## Warnings and Cautions



**CAUTION:** Use the eTrex Summit at your own risk. To reduce the risk of unsafe operation, carefully review and understand all aspects of this Owner's Manual—and thoroughly practice operation using the simulator mode prior to actual use. When in actual use, carefully compare indications from the eTrex Summit to all available navigation sources, including the information from other NAVAIDS, visual sightings, charts, etc. For safety, always resolve any discrepancies before continuing navigation.

**CAUTION:** IT IS THE USER'S RESPONSIBILITY TO USE THIS PRODUCT PRUDENTLY. THIS PRODUCT IS INTENDED TO BE USED ONLY AS A NAVIGATIONAL AID AND MUST NOT BE USED FOR ANY PURPOSE REQUIRING PRECISE MEASUREMENT OF DIRECTION, DISTANCE, LOCATION OR TOPOGRAPHY. THIS PRODUCT SHOULD NOT BE USED AS AN AID TO DETERMINE GROUND PROXIMITY FOR AIRCRAFT NAVIGATION.

**CAUTION:** The electronic chart is an aid to navigation and is designed to facilitate the use of authorized government charts, not replace them. Only official government charts and notices to mariners contain all information needed for safe navigation – and, as always, the user is responsible for their prudent use.

**CAUTION:** If the device is immersed, the electronics are protected, but the battery compartment may get wet. Make sure the batteries and compartment are dry before using.

**WARNING:** The Global Positioning System (GPS) is operated by the United States government, which is solely responsible for its accuracy and maintenance. The system is subject to changes which could affect the accuracy and performance of all GPS equipment. Although the Garmin eTrex Summit is a precision electronic NAVigation AID (NAVAID), any NAVAID can be misused or misinterpreted and, therefore, become unsafe.

**WARNING:** For use in vehicles, it is the sole responsibility of the owner/operator of the eTrex Summit to secure the unit so that it will not interfere with the vehicle's operating controls, obstruct the driver's view of driving conditions, or cause damage or personal injury in the event of an accident. Do not mount the eTrex Summit over air bag panels or in the field of air bag deployment. Air bags expand with a rapid force that can propel objects in their path toward the driver or passengers causing possible injury. Refer to air bag safety precautions contained in the vehicle's owner manual. Do not mount the eTrex Summit in a place where the driver or passengers are likely to impact it in an accident or collision. The mounting hardware provided by Garmin is not warranted against collision damage or the consequences thereof.

**WARNING:** For use in vehicles, it is the sole responsibility of the driver of the vehicle to operate the vehicle in a safe manner, maintain full surveillance of all driving conditions at all times, and not become distracted by the eTrex Summit to the exclusion of safe driving practices. It is unsafe to operate the controls of the eTrex Summit while you are driving. Failure by the driver of a vehicle equipped with a eTrex Summit to pay full attention to operation of the vehicle and road conditions while the vehicle is in motion could result in an accident or collision with property damage and personal injury.

**WARNING:** This product, its packaging, and its components contain chemicals known to the State of California to cause cancer, birth defects, or reproductive harm. This Notice is being provided in accordance with California's Proposition 65. If you have any questions or would like additional information, please refer to our Web site at <http://www.garmin.com/prop65>.

# Introduction

## **CONSUMER LIMITED WARRANTY**

This Garmin product is warranted to be free from defects in materials or workmanship for one year from the date of purchase. Within this period, Garmin will at its sole option, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the customer for parts or labor, provided that the customer shall be responsible for any transportation cost. This warranty does not cover failures due to abuse, misuse, accident or unauthorized alteration or repairs.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

IN NO EVENT SHALL Garmin BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, WHETHER RESULTING FROM THE USE, MISUSE, OR INABILITY TO USE THIS PRODUCT OR FROM DEFECTS IN THE PRODUCT. Some states do not allow the exclusion of incidental or consequential damages, so the above limitations may not apply to you.

Garmin retains the exclusive right to repair or replace the unit or software or offer a full refund of the purchase price at its sole discretion. SUCH REMEDY SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY.

To obtain warranty service, call your local Garmin authorized dealer. Or call Garmin Customer Service at one of the numbers listed below for shipping instructions and an RMA tracking number. The unit should be securely packed with the tracking number clearly written on the outside of the package. The unit should be sent, freight charges prepaid, to any Garmin warranty service station. A copy of the original sales receipt is required as the proof of purchase for warranty repairs.

Online auction confirmations are not accepted for warranty verification. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required. Garmin will not replace missing components from any package purchased through an online auction.

---

Garmin International, Inc.  
1200 E. 151st Street  
Olathe, KS 66062, U.S.A.  
Phone: 800/800.1020  
FAX: 913/397.0836

Garmin (Europe) Ltd.  
Unit 5, The Quadrangle, Abbey Park Industrial Estate  
Romsey, SO51 9DL, U.K.  
Phone: 44/0870.8501241  
FAX: 44/0870.8501251

## **SOFTWARE LICENSE AGREEMENT**

BY USING THE ETREX SUMMIT, YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY.

Garmin grants you a limited license to use the software embedded in this device (the "Software") in binary executable form in the normal operation of the product. Title, ownership rights and intellectual property rights in and to the Software remain in Garmin.

You acknowledge that the Software is the property of Garmin and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge that the structure, organization and code of the Software are valuable trade secrets of Garmin and that the Software in source code form remains a valuable trade secret of Garmin. You agree not to decompile, disassemble, modify, reverse assemble, reverse engineer or reduce to human readable form the Software of any part thereof or create any derivative works based on the Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.

## **Introduction**

## **Software License Agreement**

# Introduction

## Maintenance



*Remove the batteries from your eTrex Summit if you don't expect to use it for several months. Be sure to observe the proper polarity when inserting the batteries. Follow the battery manufacturer's instructions on the proper care and handling of the batteries.*

## **GPS CLEANING**

The eTrex Summit is constructed of high quality materials and does not require user maintenance other than cleaning. Clean the unit using a cloth dampened with a mild detergent solution and then wipe dry. Avoid chemical cleaners and solvents that may damage plastic components.

## **LENS CLEANING**

The eTrex Summit lens is coated with a special anti-reflective coating which is very sensitive to skin oils, waxes and abrasive cleaners. **CLEANERS CONTAINING AMMONIA WILL HARM THE ANTI-REFLECTIVE COATING.** It is very important to clean the lens using an eyeglass lens cleaner which is specified as safe for anti-reflective coatings and a clean, lint free cloth.

## **STORAGE**

Storing alkaline batteries in the unit for long periods of time is not recommended. In order to reduce the chance for battery leakage in the battery compartment and data card slot, remove the batteries when storing the unit for more than six months.

Do not store the eTrex Summit where prolonged exposure to temperature extremes may occur (such as in the trunk of a car) as permanent damage may result. User information, such as waypoints, routes, etc. will be retained in the unit's memory without the need for external power. It is always a good practice to back up important user data by manually recording it or downloading it to a PC (transferring it to MapSource).

## **WATER IMMERSION**

The eTrex Summit is waterproof to IEC Standard 60529 IPX7. It can withstand immersion in 1 meter of water for 30 minutes. Prolonged submersion can cause damage to the unit. After submersion, be certain to remove the batteries and data card and dry the compartments before reuse.

To resolve problems that cannot be remedied using this guide, contact Garmin Product Support in the U.S.A. at 800-800-1020 or Garmin Europe at 44-1794-519944.

The eTrex Summit is a six ounce, 12-channel, handheld GPS receiver. It has a built-in GPS antenna and only five user-buttons. All buttons are located on either side of the unit, allowing for simple, one-handed operation that won't obstruct your view of the display. It runs for up to 22 hours on two AA batteries in battery save mode (16 hours typical use).

### Other features include:

**WAAS Enabled:** WAAS enabled for accuracy less than 3 meters, 95% typical

**Waypoints:** 500 with name and graphic symbol.

**Tracks:** Automatic track log; 10,000 point active track, 10 saved tracks (750 pts. each).

**Routes:** 20 Routes that let you navigate through a set of 125 waypoints each.


**Trip Computer:** 31 data field choices, including current speed, average speed, maximum speed, bearing, elevation, location, time of sunrise/sunset, trip timer and trip odometer. Allows for dual position formats.

**Elevation Computer:** Total ascent, total descent, average ascent, average descent, maximum ascent, maximum descent, vertical speed, pressure, 12 hour pressure trend, maximum elevation, and minimum elevation.

**Hunt/Fish:** A page displaying the best times for hunting and fishing at a chosen waypoint and date.

**Sun/Moon:** A page displaying sun and moon rise and set by date and location.



## Features

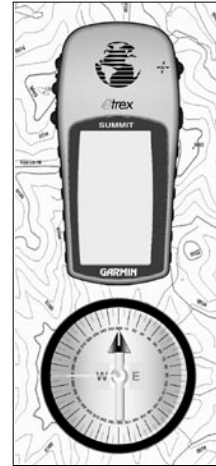


**NOTE:** You should always be prepared and capable of navigating without the eTrex Summit. It is designed to augment other forms of basic navigation, not entirely replace them.

# Introduction

## eTrex Summit Description

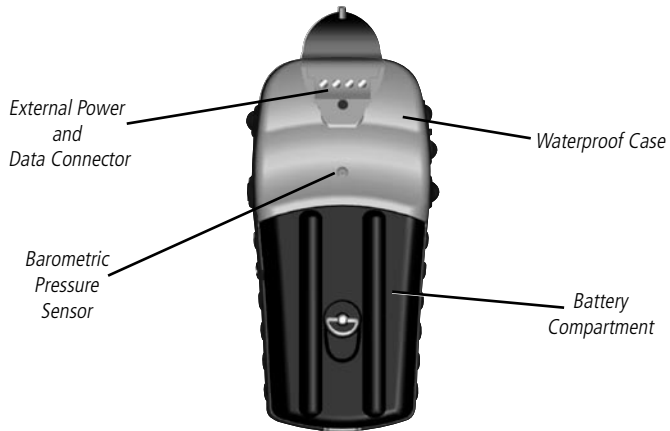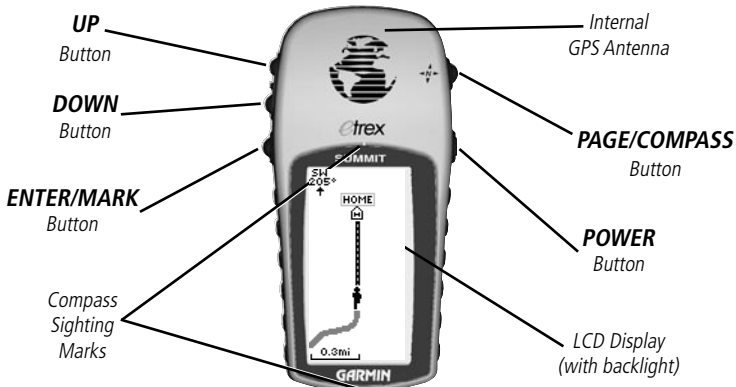

## Buttons

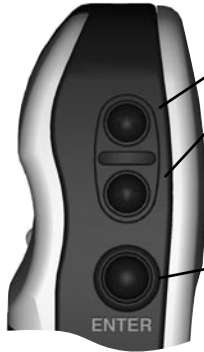

The **UP/DOWN** buttons:

- Select options on pages and menus
- Adjust Contrast on SkyView Page
- Zoom in and out on Map Page
- Cycle through trip computer data
- Cycle through elevation computer data

The **ENTER** button:

- Confirms data entry or menu selections
- Displays Options on main pages
- Pressing and holding the **ENTER** button activates the 'Mark Waypoint' page



The **PAGE** button:

- Switches display pages.
- Allows you to exit/quit a function.
- Press and hold the **PAGE** button to turn the Electronic Compass on and display the Pointer Page. When the Electronic Compass is on, press and hold the **PAGE** button to turn it off.

The **POWER** button:

- Press and hold to turn the unit on/off.
- Press to turn the display backlight on/off.

## Introduction

### Battery and Lanyard Installation



Lanyard Installation

### Installing the Batteries

The eTrex Summit operates on two AA batteries (not included), which are installed at the back of the unit. To install the batteries, remove the battery cover by turning the D-ring at the back of the unit 1/4 turn counter-clockwise. Insert the batteries observing proper polarity. Attach the battery cover by turning the D-ring 1/4 turn clockwise. The two AA batteries can last up to 16 hours during typical use.



## **Getting Started**

The *Getting Started* Section introduces you to the basic operation of the eTrex Summit. The *Reference* Section shows you how to use all of eTrex Summit's remaining features.

### **The First Step**

The eTrex Summit's GPS operates using information gathered from satellites. To initialize the unit's GPS receiver the first time, take your eTrex Summit outside and find a large, open area that has a clear view of the sky. Press and hold the **POWER** button to turn the unit on. You'll see the Welcome Page for a few seconds while the eTrex Summit performs a self-test, followed by the SkyView Page.



**NOTE:** When you use the eTrex Summit for the first time, it may take up to five minutes to find your location. After the first use, eTrex Summit only needs about 15 to 45 seconds to find your location.


The eTrex Summit needs to receive at least three strong satellite signals to find your location. The SkyView Page shows you a graphic representation of the satellites being tracked and the strength of the satellite signals. A status message is displayed at the top of the page.

When you see the "READY TO NAVIGATE" message in the status box, eTrex Summit has found your location and the GPS receiver is initialized and ready for use.


### **Backlighting and Contrast**

If lighting conditions make it hard for you to see the screen, adjust the contrast or turn on the backlight. Press and release the **POWER** button from any screen to turn on the backlight. The backlight is timed to stay on for 30 seconds. To adjust the screen contrast, press the **PAGE** button until you see the SkyView Page. Press and hold the **UP** button to make the screen darker; press and hold the **DOWN** button to make the screen lighter.

## Here We Go




The SkyView Page



The "READY TO NAVIGATE" message must appear before you can begin using your eTrex Summit to navigate.

## Getting Started

### Calibrating the Compass



The Speed Scale indicates whether you are 'TOO SLOW', 'JUST RIGHT' or 'TOO FAST'.

#### Helpful Compass Tips

1. The Electronic Compass will need to be recalibrated outdoors every time the batteries are changed.
2. The Electronic Compass will not be accurate when used in a car or around items that radiate a magnetic field.
3. When using the compass, hold the unit as level as possible. The more that the unit is tilted, the less accurate the compass will become.

### Calibrating the Electronic Compass

The eTrex Summit's Electronic Compass needs to be calibrated outdoors after the batteries have been changed, before using the unit for navigation. Failure to calibrate the Electronic Compass can result in gross inaccuracy of the compass feature.

#### To calibrate the compass:


1. Press the **PAGE** button until the MENU Page is displayed.
2. Press the **UP** or **DOWN** button to highlight 'Calibrate', then press the **ENTER** button.
3. Press the **UP** or **DOWN** button to highlight 'Compass', then press the **ENTER** button.
4. With 'Start' highlighted, press the **ENTER** button to begin the calibration.
5. Making sure that the unit is level, rotate the eTrex Summit slowly two turns in the same direction. On the display there will be a speed scale that indicates whether you are rotating the unit 'Too Fast', 'Too Slow' or 'Just Right'. A message will be displayed when the compass has been successfully calibrated.



**NOTE:** The eTrex Summit needs to be level during compass calibration and use. If the unit is tilted on either axis the compass feature will become less accurate.

## Selecting a Page

All of the information needed to operate the eTrex Summit is found on six main “pages” (or display screens). These pages are the SkyView, Map, Pointer, Trip Computer, Elevation, and Menu. Simply press the **PAGE** button to switch between pages.

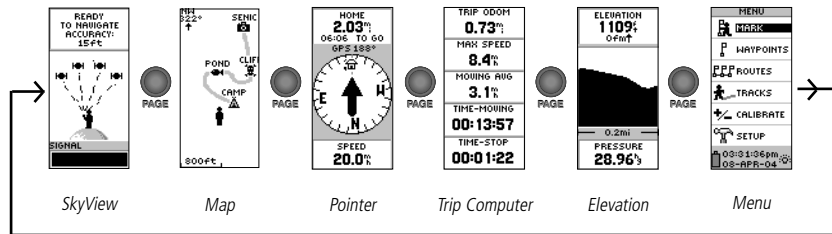


## SkyView Page Basics

The SkyView Page displays the eTrex Summit's receiver status. It also shows the strength of the satellite signals that are being received. If the signals are weak you may need to try a different location for better reception. The shorter the signal strength bar, the weaker the signals. At the top of the page the unit displays the status of the receiver. The eTrex Summit displays the message 'Ready to Navigate' when the receiver has gathered enough satellite information to begin navigation.

The page defaults to the Basic SkyView. To change to Advanced SkyView, press the **ENTER** button. For more information on the Advanced SkyView, see page 13.

## Getting Started

### Page Basics

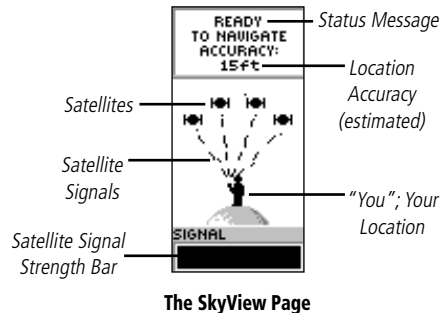


# Getting Started

## Page Basics



On the Map Page, the **UP** and **DOWN** buttons are used to adjust the map scale from 200 feet to 800 miles.

## Map Page Basics

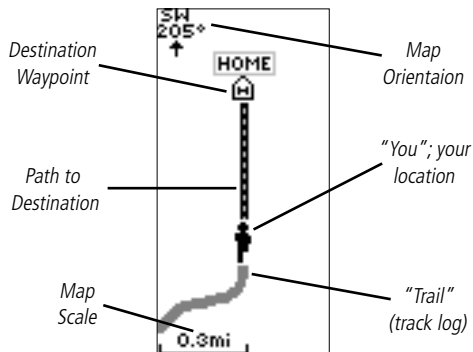


**The Map Page**

The Map Page shows where you (the animated figure) are located and provides a picture of where you are going. As you travel, the animated figure “walks” and leaves a “breadcrumb trail” known as a Track Log. The map also shows waypoint names and symbols.

To help you better visualize the “real world”, eTrex Summit is set to rotate the map automatically as you move, so that waypoints that are ahead of you are always displayed in front of the animated figure. The Map Orientation is displayed in the upper left corner of the screen. For information on changing the Map Orientation, see page 15.

To make sure you can see your entire trip, you can change the map scale from 200 feet to 800 miles. To increase the map scale, press the **UP** button. This lets you view a larger area in less detail. To decrease the map scale, press the **DOWN** button. This shows a smaller area with more detail.

## Pointer Page Basics

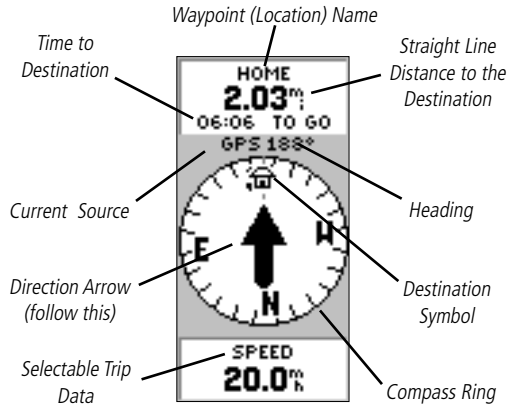

**The Pointer Page**


The Pointer Page helps guide you to a destination. When you are navigating towards a specific destination, the Pointer Page shows you the name of the location, the distance, time to go, and a direction arrow in the Compass Ring. To navigate, hold the unit as level as possible and follow the arrow. If the arrow is pointing right, turn right until the arrow is pointing directly ahead and you will arrive at your destination.

The Compass Ring reflects your heading (direction of movement). You can toggle the compass on and off by pressing and holding the **PAGE** button. The eTrex Summit will automatically select the correct source (GPS or Compass) for you based on your speed.

By pressing the **UP** or **DOWN** buttons, you can cycle through other trip computer information displayed at the bottom of the page such as average speed, maximum speed, bearing, lat/lon, elevation, time of sunrise/sunset, trip timer, and trip odometer.

## Getting Started

### Page Basics



On the Pointer Page, the **UP** and **DOWN** buttons are used to cycle through different trip data.



**NOTE:** The direction arrow and destination symbol only appear on the Pointer Page when you have started a GOTO, TracBack, or Route.


# Getting Started

## Trip Computer Page Basics

### Page Basics



Press **ENTER** to access the Trip Computer 'OPTIONS'.

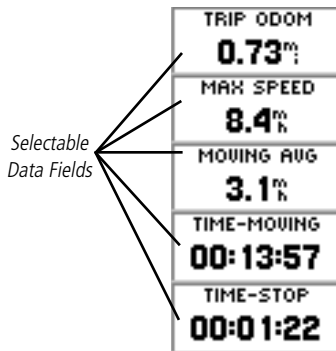


The Trip Computer Page

The Trip Computer page displays information about your travels. It contains five data fields. By default, these fields include an odometer (Trip Odom), your maximum speed (Max Speed), your average moving speed (Moving Avg), the time you spent moving (Time - Moving) and the time you spent stopped (Time - Stop).

You can customize these five fields to display information from a list of 31 available data fields. See pages 19-20 for more information.

## Elevation Page Basics

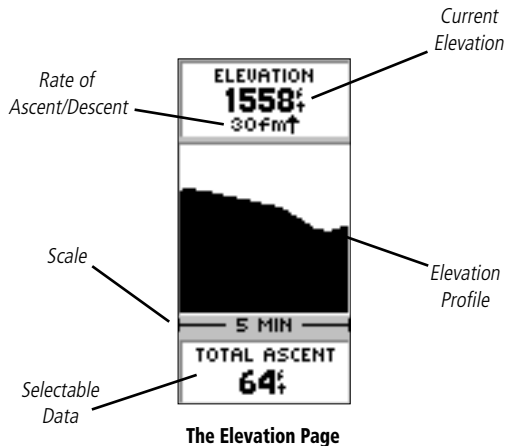


The Elevation Page provides the user with the current elevation, rate of ascent/descent, and a profile of elevation changes over distance or time. The **UP** or **DOWN** buttons can be used to scroll through a variety of user selectable data including Pressure, Vertical Speed, Max Descent, Max Ascent, Avg Descent, Avg Ascent, Total Descent, Total Ascent, Min Elevation, Max Elevation, and 12 Hour Pressure Trend.



*The Altimeter should be calibrated for the greatest accuracy. See page 40 for more information on calibrating the Altimeter.*

## Getting Started

### Page Basics



On the Elevation Page, the **UP** and **DOWN** buttons are used to cycle through a variety of user-selectable data.



Press **ENTER** to access the Elevation Page 'OPTIONS'.


# Getting Started

## Page Basics



You can select your particular time zone on the TIME page.

## Menu Page Basics

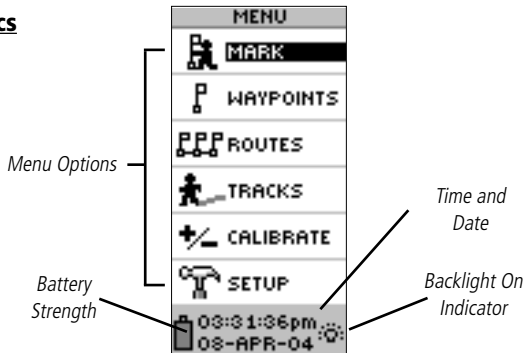

The Menu Page

The Menu Page gives you access to the eTrex Summit's more advanced features. With the Menu Page you can create and view waypoints, create a route, save and view track logs, calibrate the electronic compass and altimeter, or access the system setup features. Information on each of these advanced features is included in the Reference Section of this manual.

## Changing the Time Zone

### To change the time zone:

1. Press the **PAGE** button to switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'TIME', then press **ENTER**.
3. Press the **UP** or **DOWN** button to select the 'TIME ZONE' field, then press **ENTER**.
4. Press the **UP** or **DOWN** button to scroll through the selections. Press **ENTER** when you have found your correct time zone. Press **PAGE** to get back to the page of your choice.

## Discovering the Fun of GPS Navigation

Discovering the fun of using your eTrex Summit is as easy as taking a quick walk around an open outdoor area. In this brief exercise, you'll mark your current location (your home for example), travel a short distance away, and then have the eTrex Summit guide you back to where you started. (To get the most out of this exercise, make sure to walk for at least the time noted for each step.)

## Creating a Waypoint

The first step in the exercise is to mark your location as a waypoint.



**NOTE:** The unit must be "READY TO NAVIGATE" before you mark a waypoint.

### To mark a waypoint:

Press and hold the **ENTER** button to activate the MARK WAYPOINT Page.

The waypoint is assigned a numeric name at the time it is created. You could press **ENTER** and save the waypoint now, but for this exercise, you will make some changes to the waypoint first.

The eTrex Summit comes equipped with 31 different waypoint symbols that can be displayed on the map to help quickly identify the waypoints.

### To change the waypoint symbol:


1. On the MARK WAYPOINT Page, press the **UP** or **DOWN** button to highlight the waypoint symbol (above the waypoint name), then press **ENTER**.
2. Press the **UP** or **DOWN** button to scroll through the symbols and highlight the house symbol. Press **ENTER**.

## Getting Started

### Let the Fun Begin



The Latitude, Longitude, and Elevation are displayed along the bottom of the MARK WAYPOINT and REVIEW WAYPOINT Pages.




You can select from 31 symbols to represent a waypoint on the map.

## Getting Started

### Make Yourself at Home



Edit Waypoint Name



Map Page

### Renaming Your Waypoint

As mentioned earlier, the eTrex Summit assigns a numeric name at the time a waypoint is created. The assigned name can be easily changed to something more meaningful to help identify the waypoint. The name can be up to six characters in length. For this exercise, you will name the waypoint “HOME”.

#### To change the waypoint name:

1. On the MARK WAYPOINT Page, press the **UP** or **DOWN** button to highlight the Waypoint Name '001'. Press **ENTER**. The EDIT WAYPOINT NAME Page appears.
2. Press **ENTER**. Press the **UP** or **DOWN** button to scroll through the letter selections. Select 'H' and press **ENTER**. Repeat this process and finish the word 'HOME'.
3. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The MARK WAYPOINT Page appears.
4. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. Your location, named HOME, is now marked and stored in memory.

Now that you've marked your location, it's time to go for a walk. Press the **PAGE** button and switch to the Map Page. Walk in a straight line for 2-3 minutes at a moderate pace and watch the Map Page.

Your location is shown by the figure in the middle of the screen. As you move, the animated figure walks and a line—called a “track”—appears along the path you have just covered. If you do not see the animated figure walk, you may need to zoom in closer by pressing the **DOWN** button.

Now take a sharp right or left turn and walk for another 2-3 minutes.

## Guidance by Garmin

It is time to let the eTrex Summit guide you back to the waypoint we named 'HOME' using the GOTO function. The GOTO function provides you with a straight line navigation path to your selected destination.

### To start a GOTO:

1. Press the **PAGE** button to switch to the MENU Page.
2. Press the **UP** or **DOWN** button to highlight 'WAYPOINTS', then press **ENTER**. The WAYPOINTS Page appears.
3. Press the **UP** or **DOWN** button to select the tab containing 'HOME', then press **ENTER**.
4. Press the **UP** or **DOWN** button to select 'HOME', then press **ENTER**. The REVIEW WAYPOINT Page appears.
5. Press the **UP** or **DOWN** button to highlight 'GOTO', then press **ENTER**.

The Compass Page appears and you're ready to begin navigating!

## Heading in the Right Direction

The eTrex Summit guides you back to where you started using the Pointer Page. The pointer shows the direction of the destination waypoint. Holding the unit as level as possible, walk in the direction the arrow is pointing until the arrow points to the top of the compass ring. If the arrow points to the right, you need to go to the right. If the arrow points to the left, go left. When the arrow is pointing straight up, you are on the correct track!


The destination name, distance to the destination, and time to reach your destination are displayed at the top of the screen. The sensor (Compass or GPS) that is being used to determine your heading is displayed above the pointer. The speed you are traveling is shown at the bottom of the screen. Once you are getting close to your destination, eTrex Summit gives you the message "ARRIVING DESTINATION".

## Getting Started

### Follow the Pointer



*The pointer tells you what direction you should move. When the pointer is pointing right, just move right until the pointer is pointing straight up and points to the moving direction line (see picture below).*



*When the pointer points straight up (as shown), you're on track!*

# Getting Started

## You've Made It!



Highlight **STOP NAVIGATION** and press **ENTER** on the Options Page to stop a GOTO.

### Canceling a GOTO

#### When you want to stop a GOTO:

1. Press the **PAGE** button to switch to the POINTER or MAP Page. Press **ENTER**.
2. Highlight 'STOP NAVIGATION' on the OPTIONS Page and press **ENTER**.

### Clearing a Cluttered Map Display

After you have used the eTrex Summit a few times, the map display will become a bit messy from keeping track of your every move. You can clean up the screen by clearing the track log (the lines left on the Map Page):



---

*When you clear the Track Log you also clear the Elevation Profile. Learn how to save the Track Log and use it for 'TracBack' navigation on pages 36-39 in the Reference Section.*

---

#### To clear the track log:

1. Press the **PAGE** button to switch to the MENU Page.
2. Press the **UP** or **DOWN** button to highlight 'TRACKS'. Press **ENTER**. You are now on the TRACKS Page.
3. Press the **UP** button to highlight CLEAR, then press **ENTER**.
4. Press the **DOWN** button to highlight 'YES', then press **ENTER**.

You've now gone through the basic operation of eTrex Summit and you're ready to get out there and have some fun! To turn eTrex Summit off, press and hold the **POWER** button.

## Reference

This section will describe the features and use of the eTrex Summit in more detail than the Getting Started Section.

### SkyView Page Options

In addition to the functions of the default SkyView Page as described on page 3, there is an 'OPTIONS' menu available. To activate the 'OPTIONS' menu, press **ENTER** with the SkyView Page displayed. There are two options available:

- **Setup Display:** The Setup Display feature allows you to change the display contrast and set the time that the backlight will stay on.

#### To change the contrast:

1. Place the highlight over the Contrast Slider, then press **ENTER** to activate the slider.
2. Press the **UP** button to darken the contrast or the **DOWN** button to lighten the contrast.
3. When finished press **ENTER** to save the setting.

#### To set the (Back) Light Timeout:

1. Place the highlight over the 'LIGHT TIMEOUT' field and press **ENTER**.
2. Press the **UP** or **DOWN** button to choose the setting that you desire.
3. Press **ENTER** to save the setting.


- **Advanced SkyView:** When you select the Advanced SkyView feature the eTrex Summit displays a different SkyView Page containing more detailed information on the satellites, including their signal strength and their position in relation to you.

#### To select the Advanced SkyView Page:

Place the highlight over the 'ADVANCED SKYVIEW' field and press **ENTER**.

## SkyView Page

### Options



The SkyView Page




Normal SkyView Page  
Options

## Options



Advanced SkyView Page  
Options

## Advanced SkyView Page

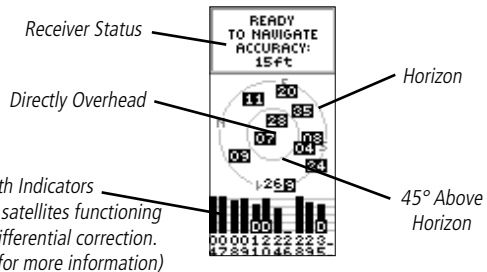

The Advanced SkyView Page also has an 'OPTIONS' menu that can be activated by pressing **ENTER** with the Advanced SkyView Page displayed. There are three options available:

- **Setup Display:** This is the same as on the default SkyView Page described on page 13.
- **Orient Sky Northward/Orient Sky Ahead:** As set from the factory, the eTrex Summit orients the satellite view with your current track toward the top of the display. When you select 'ORIENT SKY NORTHWARD' the satellite position is oriented with North at the top of the display. When 'ORIENT SKY AHEAD' is active, 'ORIENT SKY NORTHWARD' is displayed on the Options page, and vice-versa.

### To select Orient Sky Northward or Ahead:

Place the highlight over the 'ORIENT SKY NORTHWARD' or 'ORIENT SKY AHEAD' field and press **ENTER**.

- **Normal SkyView:** This options displays the default SkyView Page.

### To select Normal SkyView:

Place the highlight over 'NORMAL SKYVIEW' and press **ENTER**.

## Map Page Options

In addition to the Map Page basics described on page 4, there is a 'MAP OPTIONS' feature which allows you to customize the Map Page. The following options are available:

- **Orient Map Ahead/Northwards:** When 'AHEAD' is selected, the top of the map is oriented in the direction you are currently moving. When 'NORTHWARDS' is selected, the map is always oriented to the north, and your current position is indicated by a direction arrow (see the illustrations on this page).
- **Show Course/Bearing Line:** When using the GOTO function (see page 11), use this option to show a Course Line or Bearing Line to your destination. A Course Line is fixed from your starting location, while a Bearing Line changes based on your current location.
- **Auto Zoom On/Off:** When 'AUTO ZOOM' is turned on, the map automatically adjusts its scale to display your entire navigating route. When it's turned off, you must press the **UP** or **DOWN** buttons to select the appropriate map scale.
- **Hide Waypoints:** 'HIDE WAYPOINTS' will keep waypoint symbols and names from being displayed on the Map Page.
- **Stop Navigation:** 'STOP NAVIGATION' stops any active navigation (navigation means there is a destination waypoint or active route). This option cannot be selected if there is no active navigation.


### To select a Map Page option:

1. Press the **ENTER** button on the MAP Page. The Map Options Menu appears.
2. Press the **UP** or **DOWN** button to highlight the desired option, then press **ENTER**. Once you press **ENTER**, the change is made and the Options Menu disappears.


Notice the little grey "person" on the Map Page. The person stands still when you are not moving and moves when you move. A blinking "?" means the eTrex Summit has lost satellite reception. You should reposition the eTrex Summit or move to a place that has a clear view of the sky.

## Map Page

### Options



Selecting 'Orient Map Ahead' from the Map Page options orients the map to the direction you are moving.




When you select 'Orient Map Northwards' the figure icon is replaced by a 'direction' triangle.

## Options



When using the 'Sight 'N Go' or 'Set Course' feature of the eTrex Summit, hold the unit level and align the Sighting Marks on the case with a distant landmark.



Project Waypoint Page

## Pointer Page Options

In addition to the basics covered on page 5, there are several other Pointer Page options:

- **Sight 'N Go:** This feature allows the user to visually locate a landmark and lock its magnetic bearing. Once a bearing is locked you have the option of creating a projection waypoint or navigating along the locked bearing. Sight 'N' Go requires a GPS fix and a calibrated compass.

### To project a waypoint using Sight 'N Go:

1. Press **ENTER** to activate the options list.
2. Press the **UP** or **DOWN** button to highlight 'SIGHT 'N GO', then press **ENTER**.
3. Hold the unit level and line up the sighting marks on the case with a distant landmark.
4. Press **ENTER** to lock the magnetic bearing.
5. Press the **UP** or **DOWN** button to select either 'RE-SIGHT' or 'PROJECT'. If you select 'RE-SIGHT' you will return to step 3. If you selected 'PROJECT' proceed to step 6.



---

*A Projection Waypoint is a waypoint created at a specified distance from the eTrex Summit's current GPS location.*

---

6. The PROJECT WAYPOINT Page is displayed with the Distance field highlighted. Press **ENTER**.
7. The EDIT NUMBER Page is displayed. Press the **UP** or **DOWN** button to select the desired digit. With the desired digit selected, press **ENTER** to activate the drop down number list.
8. Press the **UP** or **DOWN** button to select the correct digit, then press **ENTER**. When all digits are entered correctly, highlight 'OK' and press **ENTER**.
9. To save the waypoint, highlight 'OK' and press **ENTER**. To begin navigation to the waypoint, highlight 'GOTO' and press **ENTER**.

The Set Course option is an additional feature of Sight 'N Go. It allows the user to visually locate a landmark, lock in a bearing to the point and begin navigation on that bearing.

When using the Set Course feature the Pointer points the direction you need to navigate, and display the cross track or the amount you are off course from straight line navigation.

### To use the Set Course feature:

1. Press **ENTER** to activate the options list.
  2. Press the **UP** or **DOWN** button to highlight 'SIGHT 'N GO', then press **ENTER**.
  3. Holding the eTrex Summit level, line up the sighting marks on the case with a distant landmark.
  4. Press **ENTER** to lock the magnetic bearing.
  5. Press the **UP** or **DOWN** button to select 'SET COURSE', then press **ENTER**. The eTrex Summit begins navigation on the locked bearing
  6. To end navigation, press **ENTER**. Press the **UP** or **DOWN** button to select 'STOP NAVIGATION', then press **ENTER**.
- **Big Heading/Compass:** this allows the user to select between seeing either large heading numbers or a large compass.
  - **Reset Max Speed:** this resets the Maximum Speed achieved during a trip.
  - **Reset Trip:** the trip time, trip distance (odometer), and average speed are reset to zeros.
  - **Stop Navigation:** stops any active navigation.

### To select a Pointer Page option:

1. Press the **ENTER** button on the POINTER Page.
2. The Options Menu appears. Press the **UP** or **DOWN** button, highlight the desired option, and press **ENTER**. Once you press **ENTER**, the change is made and the Options Menu disappears.

## Options




When using the 'Set Course' feature, the 'Pointer' indicates a direct bearing to your destination. The center of the pointer (D-Bar) will show your cross track (the distance you are right or left of the desired course). The example above shows that you are headed toward your destination but have drifted off course to the left about 50 feet. To return to your desired course turn toward the D-Bar (right) until the D-Bar aligns with the pointer

# Pointer Page

## Options



Pointer Page Options



User-Selectable Data Field

You can also change the fields at the bottom of the Pointer Page to display different data:

**Speed**—like the speedometer in your car, 'SPEED' tells you how fast you are going regardless of whether or not you are on the right track.

**Average Speed**—the average speed traveled since last trip reset.

**Max Speed**—the maximum speed traveled since last reset.

**Bearing**—the compass direction between your current location and destination.

**Elevation**—the measurement of height above mean sea level.

**Location**—shows your current latitude and longitude.

**Sunrise**—the time of sunrise at your present location.

**Sunset**—the time of sunset at your present location.

**Trip Time**—the total time you have traveled since the last trip reset.

**Trip Odometer**—like the odometer in your car, 'TRIP ODOMETER' tells you how far you've gone since the last trip reset.

### To change a data field:

On the POINTER Page, press the **UP** or **DOWN** button and scroll through the available options, stopping on the data you want the eTrex Summit to display.

## Trip Computer Page Options

In addition to the basic features of the Trip Computer described on page 6, the following Trip Computer options are available:

- **Change Fields:** The Trip Computer Page displays five fields of data at a time. The 'CHANGE FIELDS' option allow you to select the data to be displayed from a list of 31 available data fields.

### To change the fields:

1. From the Trip Computer Page, press the **ENTER** button to display the Page Options menu.
2. Press the **UP** or **DOWN** button to highlight 'CHANGE FIELDS' and press **ENTER**.
3. Press the **UP** or **DOWN** button to highlight one of the five fields to change. Press **ENTER** to display the data field options.
4. Press the **UP** or **DOWN** button to highlight an option. Press **ENTER** to accept that option.
5. Repeat Steps 3 and 4 as necessary, then press the **PAGE** button to return to the Trip Computer Page.

All available options, including those that display information only when you are actively navigating, are listed on page 20.

- **Reset Max Speed:** Resets your maximum speed to zero.
- **Reset Trip:** Resets all the data in the Trip Computer to zero.
- **Restore Defaults:** Restores the Trip Computer to display the five default data fields - Trip Odometer, Max Speed, Moving Average, Time Moving, and Time Stopped.

## Options



Press **ENTER** to access the Trip Computer 'OPTIONS'.

## Trip Computer Data Fields

- **Bearing\*** — the compass direction from your location to your destination.
- **Course\*** — the direction from your starting location to a destination.
- **Elevation** — the measurement of height above mean sea level.
- **Final Dest\*** — (Final Destination) the last waypoint on your route.
- **Final Dist\*** — (Final Distance) the distance from your location to your destination.
- **Final ETA\*** — the estimated time you will arrive at your destination.
- **Final ETE\*** — the estimated total time left until you reach your destination.
- **Heading** — the direction you are traveling.
- **Lat/Lon** — the current GPS position.
- **Location** — shows your current latitude and longitude.
- **Max Speed** — the maximum speed traveled since last reset.
- **Moving Avg** — (Moving Average) the average speed while the unit is moving.
- **Next Dest\*** — (Next Destination) the next waypoint on your route.
- **Next Dist\*** — (Next Distance) the distance between your current location and the next waypoint.
- **Next ETA\*** — the estimated time you will arrive at the next waypoint.
- **Next ETE\*** — the estimated total time left until you reach the next waypoint.
- **Odometer** — a running tally of distance traveled, based upon the distance between second-by-second position readings.
- **Off Course\*** — the distance you are off a desired course in either direction, left or right.
- **Over'l Spd** — (Overall Speed) the averaged speed since your last reset, including stopped and moving time.
- **Speed** — shows how fast you are going.
- **Sunrise** — the time at which the sun rises on this day at the current location.
- **Sunset** — the time at which the sun sets on this day at the current location.
- **Time of Day** — the current time for the selected time zone.
- **Time-Moving** — the time elapsed while the unit is moving since the last trip reset.
- **Time-Stop** — the time elapsed while the unit is not moving since the last trip reset.
- **Time-Total** — the total time you have traveled since the last trip reset.
- **To Course\*** — the compass direction you must go to get back to the original course.
- **Trip Odometer** — the total distance you've gone since the last reset.
- **Turn\*** — the angle difference (in degrees) from the bearing to your destination and your current line of travel. 'L' means turn Left, 'R' means turn Right.
- **Vert Speed** — (Vertical Speed) the rate of altitude gain/loss over time.
- **VMG\*** — (Velocity Made Good) the speed you are closing in on a destination along a desired course. Also referred to as the 'vector velocity' to your destination.

*Fields marked with an asterisk (\*) only display data while you are actively navigating.*

## Elevation Page Options

In addition to the Elevation Page basics explained on page 7, there are several options that allow the user to customize the elevation profile display.

'PLOT OVER TIME' sets the elevation profile to display changes over a set period of time.

### To select 'PLOT OVER TIME':

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'PLOT OVER TIME', then press **ENTER**.

With the elevation profile set to 'PLOT OVER TIME' you can set the time duration using the 'ZOOM TIME' option. You can set the profile to display 2 minutes, 5 minutes, 10 minutes, 20 minutes, 30 minutes, 1 hour, or 2 hours of elevation data.

### To set Zoom Time:

1. With the Elevation Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button highlight 'Zoom Time', then press **ENTER**. The display switches back to the elevation profile.
3. Press the **UP** or **DOWN** button to set the time scale.
4. When you have the correct time scale selected, press **ENTER**.


'PLOT OVER DISTANCE' sets the elevation profile to display changes over a set period of time.

### To select 'PLOT OVER DISTANCE':

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'PLOT OVER DISTANCE', then press **ENTER**.

## Elevation Page

### Options

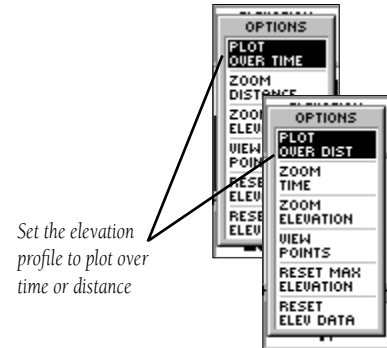


Set the elevation profile to plot over time or distance




Time Scale

# Elevation Page

## Options



Distance Scale



Vertical Distance Scale

With the elevation profile set to 'PLOT OVER DISTANCE' you can set the distance using the 'ZOOM DISTANCE' option. You can set the profile to display data over .2 miles, .5 miles, 1 mile, 5 miles, 10 miles, 15 miles, or 25 miles.

### To set Zoom Distance:

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'ZOOM DISTANCE', then press **ENTER**. The display switches back to the elevation profile.
3. Press the **UP** or **DOWN** button to select the time scale, then press **ENTER**.

The elevation profiles vertical distance can be changed using the 'ZOOM ELEVATION' option. The vertical elevation distance can be set to 200 feet, 400 feet, 600 feet, 800 feet, 1000 feet, 2500 feet, or 5000 feet.

### To set Zoom Elevation:

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'ZOOM ELEVATION', then press **ENTER**. The display switches back to the elevation profile.
3. Press the **UP** or **DOWN** button to select the vertical distance, then press **ENTER**.

The 'VIEW POINTS' options allows you to scroll through the stored elevation profile and view a single point along the profile. When the pointer is stopped at a location along the profile the elevation, time of day and date the point was created are displayed.

### View Points:

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'ZOOM ELEVATION', then press **ENTER**. The display switches back to the elevation profile.
3. Press the **UP** or **DOWN** button (Up scrolls the display left Down scrolls the display right), to select the point along the profile, then press **ENTER**.

'RESET MAX ELEVATION' resets the maximum elevation field at the bottom of the page.

### To reset the Maximum Elevation:

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'RESET MAX ELEVATION', then press **ENTER**.

'RESET ELEVATION DATA' resets all of the data fields.

### To reset the Elevation Data:

1. With the ELEVATION Page displayed, press **ENTER** to display the options list.
2. Press the **UP** or **DOWN** button to highlight 'RESET ELEV DATA', then press **ENTER**.

### Options



*Using the 'VIEW POINTS' option you can view any point in the elevation profile history.*

# Elevation Page

## Data Fields



The Elevation Page Data Field has 11 user selectable options.



On the Elevation Page, the **UP** and **DOWN** buttons are used to scroll through the user-selectable data fields.

You can also change the data field along the bottom of the Elevation Page to display different data.

**TOTAL ASCENT**—Total distance ascended.

**TOTAL DESCENT**—Total distance descended.

**AVG ASCENT**—Average rate of ascent.

**AVG DESCENT**—Average rate of descent.

**MAX ASCENT RATE**—Maximum Ascent Rate.

**MAX DESCENT RATE**—Maximum Descent Rate.

**VERTICAL SPEED**—Vertical Speed.

**PRESSURE**—Current Normalized or Ambient pressure based on the pressure setting in System Setup, see page 51.

**12HRS PRESSR**—Tracks pressure changes over a 12 hour period.

**MAX ELEVATION**—Highest elevation reached.

**MIN ELEVATION**—Lowest elevation.

### To scroll through the user selectable data:

1. Press the **UP** or **DOWN** arrow to scroll through the available data fields.

## Menu Page Selections

The Menu Page turns the eTrex Summit into a powerful navigation tool. With the Menu Page you can customize the display, transfer information from a computer to the eTrex Summit and back again, and manage and organize all of your waypoints. Now let's take a detailed look at each of the Menu Page selections.

### Mark Waypoint Page

The MARK WAYPOINT Page allows you to create a waypoint at the eTrex Summit's current location or at a location you enter in the position field. When marking a waypoint, you can change the waypoint symbol, name and elevation.

#### To mark a waypoint:

Press and hold the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'MARK.' Press **ENTER**. The MARK WAYPOINT Page appears.

#### To change the symbol:

1. From the MARK WAYPOINT Page, press the **UP** or **DOWN** button and highlight the waypoint symbol (above the waypoint name) and press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight the desired symbol. Press **ENTER** to save.

#### To change the name:

1. From the MARK WAYPOINT Page, press the **UP** or **DOWN** button to highlight the numeric name, then press **ENTER**. The EDIT WAYPOINT NAME Page appears.
2. Press the **UP** or **DOWN** button to highlight the desired letter, then press **ENTER**. A letter selection window appears. Press the **UP** or **DOWN** button to select a new letter and press **ENTER**. Repeat until all letters are changed.
3. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The waypoint name is changed.

## Menu Page

### Mark Waypoint Page




Remember that pressing and holding the **ENTER** button gives you the 'MARK WAYPOINT' Page where you can mark a waypoint.



Highlight the small flag symbol and press **ENTER** to activate the symbol selections.

# Menu Page

## Mark Waypoint Page



The 'ENTER CORRECT ELEVATION' Page allows you to change the elevation for the waypoint.



The 'EDIT LOCATION' Page displays on-screen instructions on how to edit the waypoint location.

### To change the elevation:

1. From the MARK WAYPOINT Page, press the **UP** or **DOWN** button to highlight the 'ELEV' field, then press **ENTER**. The ENTER CORRECT ELEVATION Page appears.
2. Press the **UP** or **DOWN** button to highlight the desired digit, then press **ENTER**. A selection window appears. Press the **UP** or **DOWN** button to select a new number, then press **ENTER**. Repeat until all numbers are changed.
3. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The MARK WAYPOINT Page appears with the corrected elevation displayed.

### To change the location (latitude/longitude):

1. From the MARK WAYPOINT Page, press the **UP** or **DOWN** button to highlight the 'LAT/LON' field, then press **ENTER**. The EDIT LOCATION Page appears.
2. Press the **UP** or **DOWN** button to highlight the desired letter or digit, then press **ENTER**. A selection window appears. Press the **UP** or **DOWN** button to select a new letter or number, then press **ENTER**. Repeat until location is changed.
3. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The MARK WAYPOINT Page appears.
4. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. Your location with the new latitude/longitude is now stored in memory.

## Waypoints Page

The Waypoints Page organizes all of your waypoints in an alphanumeric list. From the Waypoints Page you can select a waypoint to edit, locate the nine nearest waypoints, or delete all of the user waypoints.

### To select a waypoint:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'WAYPOINTS'. Press **ENTER**. The WAYPOINTS Page appears.
2. Press the **UP** or **DOWN** button to highlight the alphabetical tab containing the desired waypoint. Press **ENTER**. Press the **UP** or **DOWN** button to select the desired waypoint. Press **ENTER**. The REVIEW WAYPOINT Page appears (see page 28 for more information).

### To view the 'NEAREST' waypoints page:


1. On the WAYPOINTS page, press the **UP** or **DOWN** button to highlight 'NEAREST'. Press **ENTER**. The NEAREST WAYPOINTS Page appears, showing a list of the nine closest waypoints, including their name and distance from your location.
2. You can select a waypoint from this list by pressing the **UP** or **DOWN** button to select the desired waypoint. Once selected, press **ENTER**. The REVIEW WAYPOINT Page appears.

### To delete all waypoints:

1. On the WAYPOINT Page, press the **UP** or **DOWN** button to highlight 'DELETE ALL'. Press **ENTER**. A confirmation message box appears asking if you really want to delete all waypoints. If you do, press the **UP** or **DOWN** button to highlight 'YES'. Press **ENTER**.
2. If you change your mind and do not want to delete the waypoint, press the **UP** or **DOWN** button to highlight 'NO'. Press **ENTER** (or press the **PAGE** button). The confirmation message box disappears and all of the waypoints remain in memory.

## Menu Page

### Waypoints Page




Waypoint Page



*MAKE SURE you want to delete all of the waypoints before you press **ENTER**!*

## Review Waypoint Page



Select the desired symbol from the list and press **ENTER**.



Select the appropriate letter or digit press **ENTER**.

## Review Waypoint Page

The Review Waypoint Page allows you to change the waypoint symbol, name, elevation, and location. You can also delete the waypoint, display the waypoint on the Map Page, start a GOTO, view Hunt/Fish and Sun/Moon information for the waypoint, and project a new waypoint using the selected waypoint as a reference. You can access the Review Waypoint Page from the Waypoints Page (see page 27 for more information).

### To change the waypoint symbol:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight the waypoint symbol (above the waypoint name). Press **ENTER**.
3. Press the **UP** or **DOWN** button to highlight the desired symbol. Press **ENTER** to save.

### To change the waypoint name:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight the waypoint name, then press **ENTER**. The EDIT WAYPOINT NAME Page appears.
3. Press the **UP** or **DOWN** button to highlight the desired letter, then press **ENTER**. A letter selection window appears.
4. Press the **UP** or **DOWN** button to select a new letter and press **ENTER**. Repeat until all letters are changed.
5. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The waypoint name is changed.

## To change the elevation:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight the 'ELEV' field, then press **ENTER**. The ENTER CORRECT ELEVATION Page appears.
3. Press the **UP** or **DOWN** button to highlight the desired digit, then press **ENTER**. A selection window appears.
4. Press the **UP** or **DOWN** button to select a new number, then press **ENTER**. Repeat until all numbers are changed.
5. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The REVIEW WAYPOINT Page appears with the new elevation displayed.

## To change the location (latitude/longitude):

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight the 'LAT/LON' field, then press **ENTER**. The EDIT LOCATION Page appears.
3. Press the **UP** or **DOWN** button to highlight the desired letter or digit, then press **ENTER**. A selection window appears.
4. Press the **UP** or **DOWN** button to select a new letter or number, then press **ENTER**. Repeat until location is changed.
5. Press the **UP** or **DOWN** button to highlight the 'OK' field, then press **ENTER**. The REVIEW WAYPOINT Page appears. The waypoint with the new latitude/longitude is now stored in memory.

## Review Waypoint Page



The 'ENTER CORRECT ELEVATION' Page allows you to change the elevation for the waypoint.



The 'EDIT LOCATION' Page displays on-screen instructions on how to edit the waypoint location.

# Menu Page

## Review Waypoint Page



The REVIEW WAYPOINT Page allows you to delete a waypoint.



You can start a GOTO from the REVIEW WAYPOINT Page.

### To delete a waypoint:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight 'DELETE'. Press **ENTER**. A confirmation message box appears asking if you really want to delete the waypoint. If you do, press the **UP** or **DOWN** button to highlight 'YES', then press **ENTER**.
3. If you change your mind and do not want to delete the waypoint, press the **UP** or **DOWN** button to highlight 'NO', then press **ENTER**. The confirmation message box disappears and the waypoint remains in memory (you can also press the **PAGE** button to exit).

### To view the selected waypoint on the Map Page:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight 'MAP'. Press **ENTER**. The selected waypoint is displayed on the map. You can press the **UP/DOWN** buttons to zoom in and out on the map.
3. To return to the Waypoints Page, press the **PAGE** button.

### To start a GOTO:

1. Select a waypoint on the WAYPOINTS Page and press **ENTER**. The REVIEW WAYPOINT Page appears.
2. Press the **UP** or **DOWN** button to highlight 'GOTO'.
3. Press **ENTER**. The 'GOTO' is activated with the selected waypoint as the destination.

## Hunt & Fish Page

The Hunt and Fish Page provides you with a listing of best times for hunting and fishing for the chosen location (waypoint) and date.

### To view the Hunt /Fish Page:

1. On the REVIEW WAYPOINT Page, press the **UP** or **DOWN** button and highlight 'HUNT/FISH'. Press the **ENTER** button to display the HUNT/FISH Page.
2. The data provided on the page reflects best times for the current date and at the location of the waypoint unless you enter a new date in the Date Field.



**NOTE:** *The times displayed are the recognized best and good times for hunting and fishing. Be certain that they are not in conflict with state and local game laws which may vary from location to location. It is your responsibility to know and abide by these laws.*

## Sun/Moon Page

The Sun/Moon Page displays both sun and moon set and rise times for a chosen location (waypoint) and date. This page option is located at the bottom of the Hunt/Fish Page.

### To view the Sun/Moon Page:


1. On the HUNT/FISH Page, press the **UP** or **DOWN** button and highlight 'SUN/MOON'. Press the **ENTER** button to display the SUN/MOON Page.
2. View the Sunrise and Sunset Times, Moonrise, and Moonset Times as well as the Moon Phase for the waypoint location and date.
3. You can set the date at which you want to view the sun and moon position (if other than current) by entering the desired date in the Date Field.
4. Return to the HUNT/FISH Page by highlighting the Hunt/Fish option at the bottom of the page, then press the **ENTER** button.

## Menu Page

### Hunt/Fish and Sun/Moon Pages

HUNT/FISH OUTLOOK FOR HOME
03-MAR-04
GOOD DAY
BEST TIME
08:43am - 10:43am
09:01pm - 11:01pm
GOOD TIME
02:32am - 03:32am
02:54pm - 03:54pm
SUN/MOON


Hunt/Fish Page

SUN/MOON OUTLOOK FOR HOME
03-MAR-04
SUN
RISE 06:49am SET 06:13pm
MOON
RISE 02:48pm SET 05:18am
MOON PHASE 
HUNT/FISH

Sun/Moon Page

# Menu Page

## Project Waypoint Page

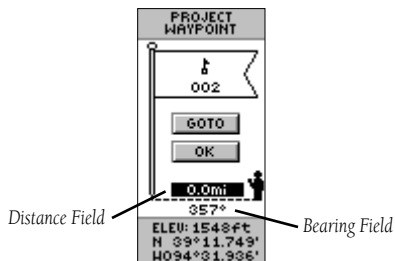

Project Waypoint Page



Edit Number Page

Using the Project feature, the eTrex Summit can create a waypoint at a specified distance and bearing using an existing waypoint as a reference. You can change the name, symbol, and elevation on this page.

### To project a waypoint:

1. Select a waypoint on the WAYPOINT Page and press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'PROJECT', then press **ENTER**. The PROJECT WAYPOINT Page is displayed and a numeric name is assigned to the new waypoint.
3. The distance field is highlighted by default. Press **ENTER** to display the EDIT NUMBER Page.
4. With the EDIT NUMBER Page displayed, press the **DOWN** button to move the highlight to the next number in the field. With the desired digit selected, press **ENTER** to activate the drop down number list.
5. Press the **UP** or **DOWN** button to select the correct number, then press **ENTER**. When all numbers are entered correctly, highlight 'OK' and press **ENTER**.
6. With the PROJECT WAYPOINT page displayed, press the **DOWN** button to highlight the bearing field, then press **ENTER** to display the EDIT ANGLE Page.
7. With the EDIT ANGLE Page displayed, press the **DOWN** button to move the highlight to the next number in the field. With the desired digit selected, press **ENTER** to activate the drop down number list.
8. Press the **UP** or **DOWN** button to select the correct number, then press **ENTER**. When all numbers are entered correctly, highlight 'OK' and press **ENTER**.
9. The name, symbol, and elevation can be changed on this page as well. When all changes have been made, highlight 'OK' and press **ENTER** to save the waypoint. Highlight 'GOTO' and press **ENTER** to save the waypoint and begin direct navigation to the point.

## Routes Page

The eTrex Summit allows you to navigate using one of three methods: GOTO (discussed on page 11-12 and page 30), TracBack (discussed on page 38), and routes.

A route is a path of travel between two or more waypoints. The route feature allows the eTrex Summit to guide you from the first waypoint in the route to each successive waypoint until you reach your final destination.

The route feature and the GOTO feature are comparable in that they both guide you to destination waypoints. However, the route feature is more useful for navigating to multiple points along a path. When you reach one waypoint, the eTrex Summit automatically guides you to the next waypoint along the route. When you use the 'GOTO' feature you have to stop and select the next waypoint before you start moving.

When creating a route, you select waypoints from the waypoint list and place them into a route in the sequence that you want to navigate to them. You need at least two waypoints (up to a maximum of 125) linked together to form a route. You can create and store up to 20 individual routes in your eTrex Summit. Your saved routes are automatically named based on the first and last waypoints in the route. Saved routes are listed on the Routes Page, with an arrow indicating which route (if any) is currently active.


When you start your trip, you activate the route feature and the receiver begins navigation toward the first waypoint in the route. You can then use the Pointer Page to give you steering guidance.

## Menu Page

### Routes Page




The 'ROUTES' feature is found on the Menu Page.

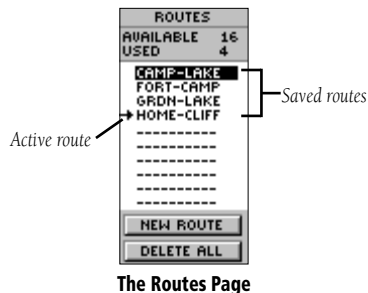


# Menu Page

## Routes Page



Use existing waypoints to create a route.



Press 'FOLLOW' to activate a route.

### To create a route:

1. Choose 'ROUTES' on the MENU Page, then highlight 'NEW ROUTE' and press **ENTER**. An empty route page appears with the first field of the route highlighted.
2. Press **ENTER**. The ADD WAYPOINT TO ROUTE Page appears.
3. Press the **UP** or **DOWN** button to select the waypoint of your choice and press **ENTER**. The waypoint you selected is placed in the first field of the route, and the second field of the route is highlighted.
4. Repeat Steps 2-3 until all of the desired waypoints are entered into the route.
5. After you have entered all the desired waypoints into your route, press **PAGE**. Your new route is saved and displayed on the ROUTES Page. The route name is based on the first and last points in your route.



*You can also plan a route using Garmin MapSource on a PC and upload the route to the eTrex Summit. See your Garmin dealer for more information on using MapSource (MapSource is an optional accessory and is not included with the eTrex Summit).*

### To activate a route:

1. From the ROUTES Page, press the **UP** or **DOWN** button to select the route that you wish to follow and press **ENTER**.
2. Press the **UP** or **DOWN** button, highlight 'FOLLOW' and press **ENTER**. You are prompted to select the destination waypoint. The choices are the beginning waypoint and the ending waypoint in the route list.
3. Press the **UP** or **DOWN** button to select the desired destination waypoint, then press **ENTER**. The eTrex Summit assumes you are at the first waypoint in the route list, and the POINTER Page appears giving you steering guidance to the next waypoint in the route list.

## Editing a Route

You can add and/or remove waypoints into an existing route.

### To insert a waypoint into a route:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button and highlight 'ROUTES.' Press **ENTER**.
2. Select the desired route and press **ENTER**.
3. Select the waypoint you want to insert a new waypoint in front of and press **ENTER**. The INSERT/REMOVE window appears. Press the **UP** or **DOWN** button to highlight 'INSERT', then press **ENTER**. The ADD WAYPOINT TO ROUTE Page appears.
4. Select the desired waypoint and press **ENTER**. The waypoint is inserted into the route.

### To remove a waypoint from a route:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button and highlight 'ROUTES.' Press **ENTER**. The ROUTES Page appears. Press the **UP** or **DOWN** button to select a route, then press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight the waypoint you want to remove, then press **ENTER**. The INSERT/REMOVE window appears. Press the **UP** or **DOWN** button to highlight 'REMOVE.' Press **ENTER** and the waypoint is removed from the list.

### To delete a route:


1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button and highlight 'ROUTES.' Press **ENTER**. Press the **UP** or **DOWN** button to select the route to be deleted, then press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'DELETE,' then press **ENTER**. The confirmation window appears asking you if you really want to delete the route. Select 'YES' and press **ENTER** to delete the route, or select 'NO' and press **ENTER** to keep the route.

## Menu Page

### Routes Page



*You can insert waypoints into or remove waypoints from an existing route.*



*Deleting a route*

## Track Log Page



You need to save the track log first before you can use the TracBack feature.



**NOTE:** For effective use of the 'TracBack' feature, save the active track, then the Track Log *BEFORE* starting a new trip.

## What is a Track Log?

The eTrex Summit draws an electronic “breadcrumb” trail on the Map Page as you travel. This breadcrumb trail is called the Track Log. The Track Log contains information about each point it plots along the way, including time, position, and elevation. After a Track Log is saved in the unit’s memory, you can use the Track Log information to navigate. You can also review the saved Track Log on the map, review the Track Log’s elevation profile, and use the Track Setup page to change the way tracks are recorded.

You can save a total of ten Track Logs in the eTrex Summit. The Track Log starts recording as soon as the unit gets a location fix. If you want to use the TracBack feature (see page 38), it is recommend that you clear the Track Log before you start traveling. The percentage of memory used by the current Track Log is displayed at the top of the Tracks page. After the Track Log is ‘CLEARED’, it shows zero percent. When the display shows 99%, the most recent track points will start overwriting the beginning track points. In order to avoid losing any track points, you should save the Track Log before it reaches 99% of memory usage.

Saved tracks can be used for navigation later. After a Track Log is saved, the saved track will have a beginning (BEGIN) point and an ending (END) point.

### To save the current Track Log:

1. With the MENU Page displayed, highlight ‘TRACKS’ and press **ENTER**. The TRACK LOG Page appears.
2. Press the **UP** or **DOWN** button to highlight ‘SAVE’, then press **ENTER**. The SAVE BACK THROUGH window appears giving you a time frame for saving a track or ‘ENTIRE LOG’.
3. Press the **UP** or **DOWN** button to select the desired option. Press **ENTER**. The saved track appears graphically on a sub-page.
4. Press the **UP** or **DOWN** button to select ‘OK’. Press **ENTER**. The track is now saved and appears in the ‘SAVED TRACKS’ list on the TRACK LOG Page.

### To clear the current Track Log:

1. With the MENU page displayed, highlight 'TRACKS' and press **ENTER**. The TRACK LOG Page will appear.
2. Highlight the 'CLEAR' button and press **ENTER**.
3. You will be asked 'DO YOU REALLY WANT TO CLEAR THE TRACK LOG?'. Highlight 'YES' and press **ENTER** to clear the current Track Log.

### To show a map of the saved track:


1. With the TRACK LOG page displayed highlight a 'SAVED TRACK' and press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'SHOW MAP', then press **ENTER**. The 'SAVED TRACK' is graphically displayed. When finished highlight 'OK' and press **ENTER**.

### To rename a saved Track Log:

1. With the MENU Page displayed, highlight 'TRACKS' and press **ENTER**. The TRACK LOG Page appears.
2. Place the highlight on a 'Saved Track' and press **ENTER**.
3. On the selection page highlight 'SHOW MAP' and press **ENTER**. The 'Saved Track' will be displayed on a map. At the top of the map is a default name. Press the **UP** or **DOWN** button to highlight the name, then press **ENTER**. The EDIT TRACK NAME Page is displayed.
4. With the EDIT TRACK NAME Page displayed, press the **DOWN** button to move the highlight to the next place in the name field. When the desired place is selected, press **ENTER** to activate the drop down alpha-numeric list.
5. Press the **UP** or **DOWN** button to select the correct character, then press **ENTER**. When the name is entered correctly, highlight 'OK' and press **ENTER**.

## Menu Page

### Track Log Page



Show Map




Renaming a Saved Track

## Track Log Options



The 'BEGIN' point is the starting point of a saved track log. 'END' is the last point that was saved. The 'BEGIN-  
END' pair imply the direction of the saved track. If you  
want to retrace the track, navigate to 'END'. If you want to  
track back to the starting point, navigate to 'BEGIN'.



Track Log Elevation Profile

There are four options that can be selected for a 'SAVED TRACK'. These options are 'TRACBACK,' 'SHOW MAP,' 'ELEVATION,' and 'DELETE'.

### To start TracBack Navigation:

1. With the 'TRACK LOG' page displayed highlight a 'SAVED TRACK' and press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'TRACBACK', then press **ENTER**. The direction window appears asking you if you want the destination to be at the beginning of the track or the end of the track (see sidebar). Press the **UP** or **DOWN** button to select the desired destination point. The POINTER Page appears guiding you to the destination you selected.

### To show the elevation profile:

1. With the TRACK LOG Page displayed highlight a 'SAVED TRACK' and press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'ELEVATION', then press **ENTER**. The elevation profile for the 'SAVED TRACK' is graphically displayed. When finished highlight 'OK' and press **ENTER**.

### To delete a saved track:

1. With the 'TRACK LOG' page displayed highlight a 'SAVED TRACK' and press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'DELETE'. Press **ENTER**. A confirmation window appears asking 'DO YOU REALLY WANT TO DELETE THIS TRACK?'. If you do, press the **UP** or **DOWN** button to highlight 'YES'. Press **ENTER**. If you change your mind, press the **UP** or **DOWN** button to select 'NO'. Press **ENTER** (or you can press **PAGE** to exit at any time).

### To delete all tracks:

1. On the TRACK LOG Page, press the **UP** or **DOWN** button to highlight 'DELETE ALL'. Press **ENTER**. The verification window appears.
2. If you really want to delete all saved tracks, press the **UP** or **DOWN** button and highlight 'YES'. Press **ENTER**. If you change your mind, press the **UP** or **DOWN** button and select 'NO', then press **ENTER** (or you can press **PAGE** to exit at any time).

## Track Setup

You can use the Track Setup page to customize the way the eTrex Summit records tracks. This page contains options for turning the track recording on or off, setting the record interval, changing the track resolution, and turning the track wrap on and off.

**Recording**—select 'ON' to record tracks or 'OFF' to stop recording.

**Record Interval**—set the type of interval for recording tracks: Distance, Time, or Auto.

**Resolution/Value**—this field combines with the Record Interval to set how often you want the eTrex to record points along your track. If you select 'Auto' for your Record Interval, select the desired resolution (high to low) for recording track points. If you select 'Distance' or 'Time' for your Record Interval, enter the desired distance or time units for recording track points.

**Wrap When Full**—if you select 'YES,' the eTrex will overwrite the beginning track points when the Track Log is full. If you select 'NO,' the eTrex will stop recording new track points when the Track Log is full.

**Defaults**—select this option to restore the factory default track settings.

### To use the Track Setup screen:

1. From the TRACK LOG page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**. The TRACK SETUP page is displayed.
2. Press the **UP** or **DOWN** button to highlight the desired fields. Press **ENTER**. Make the desired changes to the fields, then press **ENTER** to save the changes.
3. To restore the default Track settings, press the **UP** or **DOWN** button to highlight 'DEFAULTS'. Press **ENTER**. The default settings are restored.
4. After you have finished making changes, press the **PAGE** button to exit.

## Menu Page

### Track Setup Page

The screenshot shows a menu titled "TRACK SETUP" with the following options and their current values:

- RECORDING: ON
- RECORD INTERVAL: AUTO
- RESOLUTION: MEDIUM
- WRAP WHEN FULL: YES
- A button labeled "DEFAULTS" is at the bottom.


Track Setup

## Menu Page


### Calibrating the Compass and Altimeter

The 'CALIBRATE' selection on the MENU Page allows the Electronic Compass and the Altimeter to be calibrated for the most accurate performance.

### Calibration Page



Calibration Page



The eTrex Summit can automatically calibrate the altimeter using GPS altitude. For optimum performance of the Altimeter, you should perform the calibration procedure entering either the correct elevation or barometric pressure.

The procedure for calibrating the Electronic Compass is covered on page 2. The compass must be calibrated every time that the batteries are changed. The compass will not be accurate if used in a car or around items radiating magnetic fields. When using the compass, hold the unit as level as possible for optimum performance.

The eTrex Summit calibrates the altimeter automatically using GPS altitude. If you know the exact current elevation or barometric pressure, you can calibrate the altimeter manually.

#### To manually calibrate the altimeter:

1. With the MENU Page displayed, highlight 'CALIBRATE' and press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'ALTIMETER', then press **ENTER**.
3. The message 'DO YOU KNOW THE CORRECT ELEVATION?' is displayed. Press the **UP** or **DOWN** button to select 'YES' or 'NO', then press **ENTER**.
4. **If you selected 'YES'**— the ENTER CORRECT ELEVATION Page is displayed. Press the **DOWN** button to move the highlight to the next number in the elevation field. With the desired digit selected, press **ENTER** to activate the drop down number list. Press the **UP** or **DOWN** button to select the correct number, then press **ENTER**. When all numbers are entered correctly, highlight 'OK' and press **ENTER**. A message 'CALIBRATION COMPLETED SUCCESSFULLY' is displayed. Highlight 'OK' and press **ENTER**.

**If you selected 'NO'**—you will be asked 'DO YOU KNOW THE CORRECT BAROMETRIC PRESSURE'. Press the **UP** or **DOWN** button to select 'YES' or 'NO', then press **ENTER**.

**If you selected 'YES'**— the ENTER CORRECT PRESSURE Page is displayed. Use the **DOWN** button to move the highlight to the next number in the pressure field. With the desired digit selected, press **ENTER** to activate the drop down number list. Press the **UP** or **DOWN** button to select the correct number, then press **ENTER**. When all numbers are entered correctly, highlight 'OK' and press **ENTER**. A message 'CALIBRATION COMPLETED SUCCESSFULLY' is displayed. Highlight 'OK' and press **ENTER**.

If you selected 'NO'—and you are tracking satellites, you will be asked 'DO YOU WANT TO USE CURRENT GPS ALTITUDE?' If you do highlight 'YES' and press **ENTER**. A message 'CALIBRATION COMPLETED SUCCESSFULLY' will be displayed. Highlight 'OK' and press **ENTER**. If you don't highlight 'NO' and press **ENTER**. You will be prompted that 'YOU DO NOT HAVE ENOUGH INFORMATION' and referred to this manual. Highlight 'OK' and press **ENTER** to return to the MENU Page.

## Setup Page

The Setup Page allows you to customize the eTrex Summit. On the Setup Page you can change coordinate systems, map datums, and distance units. You can also change the time format, north reference, operating mode, display contrast, and display back light timeout.

## Time Page

The Time Page allows you to select a 12-hour or 24-hour time format, enter the proper time zone, and choose Daylight Savings Time.

### Time Format


In the 12-hour time format, the clock functions like a standard clock with 12-hour AM and 12-hour PM cycles. The 24-hour option displays a 24-hour cycle (Military Time).

#### To change the time format:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'TIME', then press **ENTER**.
3. Press the **UP** or **DOWN** button to select the 'TIME FORMAT' field, then press **ENTER**.
4. Press the **UP** or **DOWN** button to select 12 or 24 hours, then press **ENTER**. Press **PAGE** to get back to the page of your choice.

## Setup Page

### Setup Page



#### The Setup Page



*You can choose from eight time zones plus 'other'.*

# Setup Page

## Time Page



UTC stands for 'Coordinated Universal Time' and replaced Greenwich Mean Time (GMT) as the World standard for time in 1986. It is based on atomic measurements rather than the earth's rotation.



The eTrex Summit can automatically select the Daylight Saving Time mode.

## Time Zone

The Time Zone field can be set to any one of eight pre-programmed zones. To change the time zone, follow the steps given on page 8.

## UTC Offset

You can use the UTC Offset field to manually set the eTrex Summit to match any time zone in the world. To access the UTC Offset field, select 'OTHER' for the time zone, then enter the desired time offset from UTC time.

## Daylight Saving Time

Daylight Saving Time can be set to 'Automatic' (using the built-in almanac to automatically change the clock settings when daylight saving goes into or out of effect). You can choose 'Yes' to manually add daylight saving or 'No' to remain on standard time.

### To change the Daylight Savings field:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**. The 'SETUP' Page appears.
2. Press the **UP** or **DOWN** button to highlight 'TIME', then press **ENTER**.
3. Press the **UP** or **DOWN** button to highlight 'DAYLIGHT SAVING', then press **ENTER**.
4. Press the **UP** or **DOWN** button to select 'AUTO', 'YES', or 'NO', then press **ENTER**. Press **PAGE** to get back to the page of your choice.



**NOTE:** The Daylight Saving Time setting does not affect the UTC offset number.

## Display Page

The Display Page allows you to set the display backlight timeout (on all the time, 15 or 30 seconds, and 1 or 2 minutes) and the display contrast.

### To change the light timeout:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'DISPLAY', then press **ENTER**. Press **ENTER** on the 'LIGHT TIMEOUT' field.
3. Press the **UP** or **DOWN** button to highlight your selection, then press **ENTER**. Press **PAGE** to get back to the 'SETUP' page.

### To adjust the display contrast:

1. Press the **PAGE** button to switch to the 'MENU' Page. Press the **UP** or **DOWN** button to highlight 'SETUP', then press **ENTER**. The 'SETUP' Page appears.
2. Press the **UP** or **DOWN** button to highlight 'DISPLAY', then press **ENTER**. Press the **UP** or **DOWN** button to highlight the 'CONTRAST' icon, then press **ENTER**.
3. Press the **UP** or **DOWN** button to adjust the contrast, then press **ENTER**. Press **PAGE** to get back to the 'SETUP' page.

## Units Page


Using your eTrex Summit with a paper map increases the navigation power of both. If you are going to use a map in conjunction with the eTrex Summit, you must select the position format (grid), map datum, map units, and north reference to match the map's units. This is the purpose of the Units Page. Regarding position format, the eTrex Summit allows you to choose from more than eighteen different grids. The eTrex Summit supports the UTM/UPS and latitude/longitude grids because together they cover the world.

## Setup Page

### Display and Units Pages



*You can set the backlight to stay on all the time, but watch your battery power!*




*The Units Page allows you match the units of the eTrex Summit to the units of a unique paper map you may be using.*

# Setup Page


## Units Page



*Eighteen position formats are available in the eTrex Summit.*



**User Datum**



**User Grid**

*Data entry pages for the User Grid Format and the User Datum Setup allow you to configure the eTrex Summit for compatibility with custom designed grids. We recommend surfing the net for links to Garmin user-grid and user datum information. There are also excellent navigation and GPS articles available on-line which will enhance your overall knowledge of GPS.*

## Position Format

The default position format (and the one most commonly used) for the eTrex Summit is latitude and longitude in degrees and minutes (hddd° mm.mmm). You may also choose from 17 other position formats. There is also a “User” position format which allows you to approximate custom-designed grids. For more information on grids and datums we recommend you visit the National Imagery and Mapping Agency at <http://www.nima.mil>.

### To change the Position Format:

1. Press the **PAGE** button and switch to the MENU Page. Press the **UP** or **DOWN** button and highlight 'SETUP'. Press **ENTER**. Press the **UP/DOWN** buttons to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
2. Press the **UP** or **DOWN** button to select the 'POSITION FRMT' field. Press **ENTER**.
3. Press the **UP** or **DOWN** button to select the desired format. Press **ENTER**. Press **PAGE** to get back to the page of your choice.

## Map Datums

A map datum is a reference model of the earth's shape. Every map uses a map datum. The map datum is usually listed in the title block of the map. If you are comparing GPS coordinates to a paper map or other reference, the map datum in the eTrex Summit should match the horizontal map datum used to generate the chart or other reference.

The default datum in the eTrex Summit is WGS 84 (World Geodetic Survey, 1984). You should only change the datum if you are using maps or charts that specify a different datum than WGS 84. If no datum is specified, you can select each datum applicable to your region until you find the datum that provides the best positioning at a known point. You may also choose the “User” datum for use with custom-designed grids.

**To change the Map Datum:**

1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
3. Press the **UP** or **DOWN** button to select the 'MAP DATUMS' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to select the desired datum. Press **ENTER**.

**Distance/Speed Units**

The eTrex Summit lets you select statute (the default setting), nautical, or metric units of measure for all speed and distance readouts.

**To change the Distance/Speed units:**


1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
3. Press the **UP** or **DOWN** button to select the 'UNITS' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to select the desired unit. Press **ENTER**. Press **PAGE** to select the page of your choice.

**Elevation/VSPD (vertical speed)**


The eTrex Summit lets you select feet or meters for elevation and vertical speed readings.

**To change the Elevation/VSPD units:**

1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
3. Press the **UP** or **DOWN** button to select the 'ELEVATION/VSPD' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to select 'FEET' or 'METERS'. Press **ENTER**. Press **PAGE** to select the page of your choice.

**Units Page**

You can select statute, nautical, or metric units of measurement from the 'UNITS' page.



The 'DEFAULTS' setting will reset the eTrex Summit units to all of its factory settings.

## Units Page



Pressure Units



Angle Units

## Pressure

### To change Pressure units:

1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
3. Press the **UP** or **DOWN** button to select the 'PRESSURE' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to select 'INCHES' or 'MILLIBARS'. Press **ENTER**. Press **PAGE** to select the page of your choice.

## Angle

You can set the eTrex Summit to display directional information in 'DEGREES' or in 'MILS'.

### To select an Angle setting:

1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'UNITS'. Press **ENTER**. The UNITS Page appears.
3. Press the **UP** or **DOWN** button to select the 'ANGLE' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to select 'DEGREES' or 'MILS'. Press **ENTER**. Press **PAGE** to select the page of your choice.

## Interface Page

The Interface Page allows you to connect and use devices such as computers and differential GPS (DGPS) beacon receivers to the eTrex Summit. Below is a description of the available formats.

### Input/Output Formats


- **GARMIN** - the proprietary format used to exchange waypoint, route, and track data with a PC.
- **GARMIN DGPS** - allows DGPS input using a Garmin beacon receiver and a standard RTCM SC-104 format and DGPS tuning.
- **NMEA OUT** - supports the output of standard NMEA 0183 version 2.0 data.
- **TEXT OUT** - allows simple ASCII text output of location and velocity information, without any input capabilities.
- **RTCM IN** - allows DGPS input using a standard RTCM SC-104 format without any output capabilities.
- **RTCM/NMEA**- allows DGPS input using a standard RTCM SC-104 format and supports the output of standard NMEA 0183 version 2.0 data.
- **RTCM/TEXT**- allows DGPS input using a standard RTCM SC-104 format and simple ASCII text output of location and velocity information.
- **NONE** - Provides no interfacing capabilities.

## Setup Page

### Interface Page



*The interface options will allow you to use a PC to download waypoints, routes, and track logs.*



**NMEA** stands for “National Marine Electronics Association” and **RTCM** stands for “Radio Technical Commission for Maritime Services”. Both are involved in developing technical standards for the marine electronics industry.

## Setup Page

### Heading Page



*While mounted in a car or on a cycle the eTrex Summit will be tilted enough for the Electronic Compass to become inaccurate. The eTrex Summit will automatically switch to a GPS heading when you exceed 10 mph. To switch back to the compass press and hold the **PAGE** key or wait 90 seconds after slowing below 10*

If 'GARMIN DGPS' or 'RTCM/NMEA' format is selected, additional fields are provided to control a Garmin differential beacon receiver directly from your eTrex Summit. You can enter the beacon frequency and bit rate when you select 'User' from the Beacon pop-up list to manually tune the receiver (you can also 'scan' if you don't know what the nearby station is, but the unit could continue scanning if reception is temporarily lost).

#### **To select an I/O Format:**

1. Press the **PAGE** button to switch to the MENU Page. Press the **UP** and **DOWN** button and highlight the 'SETUP' field. Press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to select the 'INTERFACE' field. Press **ENTER**. The INTERFACE Page appears.
3. Press **ENTER** on the 'I/O FORMAT' field. Press the **UP** or **DOWN** button to select the desired format. Press **ENTER**. Press **PAGE** to return to the page of your choice.

#### **Heading Page**

The eTrex Summit automatically switches between the Electronic Compass and GPS to determine your heading.

The eTrex Summit needs to be held level for the Electronic Compass to provide an accurate heading. When mounting the eTrex Summit in a car or on a cycle, the unit will need to be tilted in order to see the display, making the compass less accurate. eTrex Summit will switch over, using GPS to track your heading when you exceed 10 miles per hour. When you slow down, you can press and hold the **PAGE** button to switch back to using the Electronic Compass.

**To set the switch-over speed:**


1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'HEADING'. Press **ENTER**. The HEADING Page appears.
3. Press the **UP** or **DOWN** button to select the 'USE GPS HEADING WHEN EXCEEDING' field, then press **ENTER**. The EDIT NUMBER Page will be displayed.
4. Press the **DOWN** button to move the highlight to the next number in the speed field. With the desired digit selected, press **ENTER** to activate the drop down number list. Press the **UP** or **DOWN** button to select the correct number, then press **ENTER**. When all numbers are entered correctly, highlight 'OK' and press **ENTER**.

**To set the switch-back period:**


1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to select 'HEADING', then press **ENTER**. The HEADING Page appears.
3. Press the **UP** or **DOWN** button to select the 'USE GPS HEADING WHEN EXCEEDING' field, then press **ENTER**. A list of selections will appear.
4. Press the **UP** or **DOWN** button to move the highlight through the list. When the desired selection is highlighted, press **ENTER**.

**North Reference**

'Reference' refers to the orientation of a map's grid. Map makers try to align the vertical lines on a map with '**True North**' (**TRUE**). True North is the direction from any location on the earth's surface to the "North Pole". Maps are typically referenced to true north. Because a compass points to magnetic north, not true north, maps indicate the difference between true and magnetic north with something called 'variation' or 'declination'. The amount of variation/declination changes as you move around the earth. '**Magnetic North**' (**MAG**) is the direction in which a compass needle points.

**Heading Page**


*The eTrex Summit can be set to disable the Electronic Compass above a user selected speed. This helps to conserve battery power.*



*Set a time delay before switching to the electronic compass when moving at a speed slower than the user-selectable speed.*

# Setup Page

## North Reference



The eTrex Summit automatically adjusts the variation/declination. While it should rarely be needed the user can manually adjust the variation/declination.



To manually set the variation or declination, highlight the Angle field, press **ENTER** and input a new angle.

Due to errors introduced when map makers flatten the earth's sphere onto paper, not all of the grid lines drawn on the map point exactly to the north pole, so the north indicated by the grid lines is called '**Grid North**' (**GRID**). But the difference is usually small enough that 'Grid' north can be considered the same as True North for travelling on land. If necessary, you can select a '**User Defined Grid**' (**USER**) to correct for the difference between Grid North and True North manually. The eTrex Summit reflects the North Reference setting when using the GPS or Electronic Compass for a bearing.



---

*The Electronic Compass reflects the North Reference setting. If you have selected 'TRUE NORTH' the Electronic Compass points 'TRUE NORTH,' not Magnetic North.*

---

### To change the North Reference:

1. From the MENU Page, press the **UP** or **DOWN** button to highlight 'SETUP'. Press **ENTER**.
2. Press the **UP** or **DOWN** button to highlight 'HEADING', then press **ENTER**. The HEADING Page appears.
3. Press the **UP** or **DOWN** button to select the 'NORTH REF' field, then press **ENTER**.
4. Press the **UP** or **DOWN** button to select the desired reference. Press **ENTER**. Press **PAGE** to return to the page of your choice.

When you select the 'DEFAULTS' field and press **ENTER**, the UNITS Page returns to the factory settings.

## System Page

The System Page shows you the current GPS mode, Compass mode, Altimeter 'Auto Cal' mode, and Software Version. You can choose from four modes of GPS operation: Normal, WAAS, Battery Save, or Demo (Demonstration).

- **Normal Mode** - 'NORMAL' mode means the GPS is active and running whenever the unit is powered on.
- **WAAS Mode** - WAAS is designed to improve the overall accuracy and integrity of the GPS signal. 'WAAS' mode utilizes more battery power than regular mode. For more information, see "What is WAAS?" on Page 56.
- **Battery Save Mode** - 'BATTERY SAVE' mode optimizes the GPS receiver's power consumption.
- **Demo Mode** - The 'DEMO' mode is designed to demonstrate the features and functions of the eTrex Summit inside a closed building where satellite reception is not possible. There is no navigation possible in 'DEMO' mode, but you can simulate many of the unit's functions.

If you select the 'DEMO' mode, a window appears asking you to verify that you want to turn the GPS receiver off (this does not power off the unit). To do so, press **ENTER**.

### To select an operating mode:


1. From the MENU Page, highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight 'GPS'. Press **ENTER**. The Option List appears.
4. Press the **UP** or **DOWN** button to highlight the desired mode and press **ENTER**.

## Setup Page

### System Page



*Turn the GPS receiver to 'BATTERY SAVE' mode to conserve power when using as a compass or developing a pressure trend.*



*When the unit is in 'DEMO' mode, a warning will appear indicating that the GPS receiver is turned off.*

## Setup Page

### System Page



Press and hold the **PAGE** key to activate the compass and display the Pointer Page



Auto Calibrate

### Compass

The eTrex Summit allows you to turn the Electronic Compass on and off. Turning the compass off when not needed helps conserve battery power.

#### To turn the compass On/Off:

1. From the MENU Page, highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight the 'COMPASS' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to highlight the desired mode and press **ENTER**.

### Altimeter

The Altimeter can use GPS altitude to perform an automatic calibration. While this is not as accurate as the calibration procedure described on page 40, it can be useful in the event that you do not know your current elevation or the barometric pressure.

#### To turn 'AUTO CAL' On/Off:

1. From the MENU Page, highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight the 'ALTIMETER' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to highlight the desired mode, then press **ENTER**.

## Pressure

You can set the eTrex Summit to display either normalized pressure or the local ambient pressure in the Elevation Page cycle field. The normalized pressure is referenced against the last calibrated altitude or pressure.

### To select a pressure for display:

1. From the MENU Page, highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight the 'PRESSURE' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to highlight the desired pressure. Press **ENTER**.

## Language

The eTrex Summit can display in 12 languages.

### To select a language:

1. From the MENU Page, highlight 'SETUP', then press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight the 'LANGUAGE' field. Press **ENTER**.
4. Press the **UP** or **DOWN** button to highlight the desired selection. Press **ENTER**.

## Software Version

The Software Page shows the eTrex Summit's current software version. To update the eTrex Summit's software, visit the Garmin Web site ([www.garmin.com](http://www.garmin.com)).

## Defaults

The 'DEFAULTS' option resets all of the 'SYSTEM' setting to the factory defaults.

## Setup Page

## System Page



The eTrex Summit can display in 12 different languages.



The System Page shows you the software version, allowing you to update from Garmin's Web site.

# Appendix A

## Specifications

Specifications subject to change without notice.

<sup>1</sup>Subject to accuracy degradation to 100m 2DRMS under the U.S. DOD Selective Availability program.

<sup>2</sup>With optional Garmin Differential Beacon Receiver Input.

<sup>3</sup>Subject to proper user calibration.

<sup>4</sup>The temperature rating for the eTrex Summit may exceed the usable range of some batteries. Alkaline batteries can rupture at high temperatures. External power can only be applied using the Garmin Auto Power Adapter (P/N 010-10203-00) or PC Interface Cable with Auto Power Adapter P/N 010-10268-00; this cable contains a voltage regulator). Modifications or other applications will void the product warranty.

<sup>5</sup>Alkaline batteries lose a significant amount of their capacity as temperature decreases. Use lithium batteries when operating the eTrex Summit in below-freezing conditions. Extensive use of screen backlighting will drastically reduce battery life.

### Physical

<b>Case:</b>	Fully-gasketed, high-impact plastic alloy, waterproof to IPX7 standards (waterproof to 1 meter for 30 minutes)
<b>Size:</b>	4.4" H x 2" W x 1.2" D
<b>Weight:</b>	Approx. 5.3 ounces (150g) w/batteries
<b>Temperature Range:</b>	5° to 158°F (-15° to 70°C) <sup>3</sup> (operating)

### Performance

<b>Receiver:</b>	Differential-ready, 12 parallel channel
<b>Acquisition time:</b>	Approx. 15 seconds (warm start) Approx. 45 seconds (cold start) Approx. 5 minutes (First Time/AutoLocate™)
<b>Update Rate:</b>	1/second, continuous
<b>GPS Accuracy:</b>	<15 meters (49 ft) RMS <sup>1</sup>
<b>DGPS (USCG) Accuracy:</b>	1-5 meters (3-15 ft) with DGPS corrections <sup>2</sup>
<b>DGPS (WAAS) Accuracy:</b>	3 meters (10ft) 95% typical with DGPS corrections
<b>Velocity Accuracy:</b>	0.1 knot RMS steady state
<b>Dynamics:</b>	Performs to specifications to 6 g's
<b>Interfaces:</b>	NMEA 0183 (versions 2.00-3.0), RTCM 104 (for DGPS corrections) and RS-232 for PC interface
<b>Antenna:</b>	Built-In
<b>Compass:</b>	accuracy: ± 5 degrees <sup>3</sup> , resolution: 1 degree
<b>Altimeter:</b>	accuracy: ± 10 feet <sup>3</sup> , resolution: 1 foot

### Power

<b>Input:</b>	Two 1.5-volt AA batteries <sup>4</sup>
<b>Battery Life:</b>	Up to 16 hours of typical use <sup>5</sup> (22 hours in battery save mode)

The global positioning system is a satellite-based navigation system consisting of a network of 24 orbiting NAVSTAR satellites that are eleven thousand nautical miles in space and in six different orbital paths. The satellites are constantly moving, making two complete orbits around the Earth in less than 24 hours.

The orbital paths of these satellites take them between roughly 60 degrees North and 60 degrees South latitudes. What this means is you can receive satellite signals anywhere in the world, at any time.

One of the biggest benefits over previous land-based navigation systems is GPS works in all weather conditions. No matter what your application, when you need it the most, your GPS receiver keeps working.

So what information does a GPS satellite transmit? The GPS signal contains a 'pseudo-random code', ephemeris (pronounced: ee-fem-er-is), and almanac data. The pseudo-random code identifies which satellite is transmitting—in other words, it is an I.D. code. We refer to satellites by their PRN (pseudo-random number), from 1 through 32, and this is the number displayed on a GPS receiver to indicate which satellite(s) we are receiving. Ephemeris data contains important information such as satellite status (healthy or unhealthy), and the current date and time. The almanac data tells the GPS receiver where each GPS satellite should be at any time throughout the day. Each satellite transmits almanac data that provides orbital information for all of the satellites in the GPS network.

Your GPS receiver reads the message and saves the ephemeris and almanac data for continual use. Now, to determine your position, the GPS receiver compares the time a satellite signal was transmitted with the time it was received by the GPS. The time difference tells the GPS receiver how far away that particular satellite is. If we add distance measurements from a few more satellites, we can triangulate our position. This is exactly what a GPS receiver does. With a minimum of three or more satellites, your GPS can determine a latitude/longitude position—what's called a 2D position fix. With four or more satellites, a GPS receiver can determine a 3D position fix which includes latitude, longitude, and altitude. By continuously updating your position, a GPS receiver can also accurately provide speed and direction of travel (referred to as 'ground speed' and 'ground track').

### What is GPS?



### What is WAAS?

#### WAAS Capability

The eTrex Summit is capable of receiving WAAS (Wide Area Augmentation System) satellite signals. WAAS is an FAA (Federal Aviation Administration) funded project to improve the overall accuracy and integrity of the GPS signal for aviation use, but land/sea based users may also benefit from this system. At this time, the system is still in the development stage. There are currently two WAAS satellites that can be received in the U.S.A., one over the Atlantic Ocean and one over the Pacific Ocean, in a geo-stationary orbit over the equator. Effective use of the WAAS satellite signal may be limited by your geographic location in relation to those satellites, now in developmental service. WAAS satellite signal reception requires an absolute clear view of the sky and works best when there are no nearby obstructions such as buildings or mountains. WAAS satellites are numbered 33 or higher when viewing the sky view on your eTrex Summit. Initial reception of the WAAS signal may take up to 15-20 minutes, then 1-2 minutes afterwards. When WAAS differential correction has been received for GPS satellites (numbers 32 or below), a 'D' appears in the signal bar of the Advanced Sky View. When enough satellites have received WAAS differential correction, 'DIFF' appears below the 'Ready to Navigate' message. To learn more about the WAAS system, its satellite positions and current state of development, visit the FAA Web site (<http://gps.faa.gov>). Since WAAS requires CPU resources of the eTrex Summit to search for and track the satellites, you may disable the WAAS feature to improve unit performance if WAAS reception is not available in your area.

#### **To disable/enable WAAS capability:**

1. From the MENU Page, highlight 'SETUP' and press **ENTER**. The SETUP Page appears.
2. Press the **UP** or **DOWN** button to highlight 'SYSTEM'. Press **ENTER**. The SYSTEM Page appears.
3. Press the **UP** or **DOWN** button to highlight 'GPS'. Press **ENTER**. The Option List appears.
4. Press the **UP** or **DOWN** button to highlight 'WAAS' mode and press **ENTER**.

**Why won't the eTrex Summit power on?**

Check to see if the batteries are installed correctly and that the battery terminals are clean.

**Can I use the eTrex Summit indoors?**

Not for navigation, but you can edit existing waypoints and routes, and you can use the Demo mode to practice (see page 51).

**Do I need to subscribe to a service to use the eTrex Summit?**

No. The GPS satellites are owned by the United States Department of Defense (DoD) and have been funded by U.S. taxpayers' dollars. Reception of GPS satellite signals is free to everyone.

**Does the eTrex Summit work anywhere in the world and in any weather?**

Yes.

**How accurate is a Garmin GPS?**

The eTrex Summit is accurate to within 15 meters. Using differential techniques (WAAS), the eTrex Summit can be as accurate as 1-5 meters.

**Why can't I see the display in the daylight?**

Adjust the contrast (see page 1).

**Why can't I interface my computer with the eTrex Summit?**

Make sure that you have the correct INPUT/OUTPUT format selected on your eTrex Summit.

**What does the message "NO DGPS POSITION" mean?**

eTrex Summit had a differential fix and lost it.

**What do I do if it takes more than 10 minutes to get a location fix?**

There may be large obstacles overhead. Move to a new location with a clear view of the sky. See "Satellite Reception Tips" on page 62.

**Why don't the eTrex Summit coordinates match the location on my map?**

Make sure the unit is configured to use the same datum as your map. See pages 44–45.

**FAQs****What Grid Formats does the eTrex Summit Support?**

hddd.ddddd<sup>0</sup> (degrees, decimal degrees)  
 hddd<sup>0</sup>mm.mm  
 hddd<sup>0</sup>mm'ss.s  
 British Grid  
 Dutch Grid  
 Finnish KJ27 Grid  
 German Grid  
 Irish Grid  
 Maidenhead  
 MGRS (Military Grid Reference System)  
 New Zealand  
 Qatar Grid  
 Swedish Grid  
 Swiss Grid  
 Taiwan Grid  
 UTM/UPS Grid  
 W Mayalan R  
 User Grid

## Appendix E

### Accessories



Automotive Mounting Bracket



Handlebar Mounting Kit



Cigarette Lighter Adapter

### Accessories

See your Garmin dealer or visit [www.garmin.com](http://www.garmin.com) for availability.

#### **Manuals**

- \*Owner's Manual..... Part No. 190-00396-00
- \*Quick Start Guide ..... Part No. 190-00396-01

#### **Bracket Mounts**

- Automotive Mounting Bracket..... Part No. 010-10274-00  
*Can be temporarily or permanently mounted on the dash.*
- Handlebar Mounting Bracket..... Part No. 010-10267-00  
*Allows the eTrex Summit to be mounted on handle bars.*

#### **Cables**

- Cigarette Lighter Adapter ..... Part No. 010-10203-00  
*Provides power for eTrex Summit from a automobile cigarette lighter.*
- PC Interface Cable..... Part No. 010-10206-00  
*Allows for serial transfer of data between a PC and eTrex Summit.*
- Data Cable (bare wires) ..... Part No. 010-10205-00  
*Wiring harness. Connections for data input/output.*
- PC Cable with Cigarette Lighter ..... Part No. 010-10268-00  
*Allows for serial transfer of data between a PC and an eTrex Summit while providing unit power from an automobile cigarette lighter.*

\* Included with unit

## Accessories, continued

### Other

Carrying Case..... Part No. 010-10266-00

*Protects the eTrex Summit when not in use (nylon, neoprene).*

\*Lanyard..... Part No. 013-00052-00

*Provides convenient method for carrying the eTrex Summit.*

\*Battery Cover..... Part No. 011-00529-00

Instructional Video..... Part No. 010-10281-00

### MapSource® Map Data CD-ROMs

*An excellent tool for creating waypoints and routes on your PC using a background map and downloading them to your eTrex Summit.*

\* Included with unit



**NOTE:** *The Cigarette Lighter Adapter (part number 010-10203-00) converts 12 VDC to 3 VDC output for the eTrex Summit. This adapter is not interchangeable with the car power adapters designed for the Garmin VHF 720 and 725, GPS 170, 175, 190 and 195.*

## Appendix E

### Accessories




PC/Cigarette Lighter Adapter



Carrying Case

## Wiring Diagram

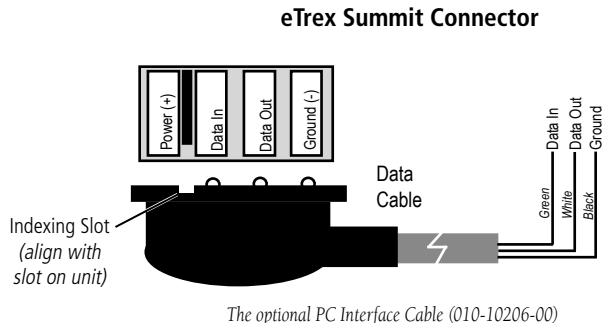

Interface formats are selected from the SETUP Page. The input/output lines on your eTrex Summit are RS-232 compatible, allowing easy interface to a wide range of external devices, including PCs, differential beacon receivers, marine autopilots and/or a second GPS receiver.

The NMEA 0183 version 2.0 interface format is supported by the eTrex Summit and enables the unit to drive up to three NMEA devices.

### **NMEA 0183 Version 2.0 Approved Sentences:**

GPGGA, GPGLL, GPGSA, GPGSV, GPRMB, GPRMC, GPRTE, GPWPL, GPBOD, HCHDG

### **Garmin Proprietary Sentences:**

PGRME (estimated error), PGRMM (map datum), PGRMZ (altitude), PSLIB (beacon receiver control)

DGPS (Differential GPS) corrections are accepted in RTCM SC-104 version 2.0 format through the 'Data In' line.

The eTrex Summit may be hard-wired to a serial connector using the Data Cable (see your Garmin dealer or visit [www.garmin.com](http://www.garmin.com) for availability). Refer to the wiring diagram and the eTrex Summit unit data connection illustrated above.

#### **If the eTrex Summit does not turn on:**

Check to see if the batteries are installed correctly and if the battery terminals are clean.

#### **If it takes more than 10 minutes to get a location fix:**

1. There may be large obstacles overhead. Move to a new location with a clear view of the sky.
2. See “Satellite Reception Tips” on page 62.

#### **eTrex Summit coordinates do not match the location on your map:**

Check to make sure the eTrex Summit is configured to use the same datum as your map. See page 44.

#### **The Electronic Compass heading is incorrect:**

1. Have you changed batteries? Remember that the compass needs to be recalibrated every time that the batteries are changed. See page 2 for the compass calibration procedure.
2. Are you inside or around a device that may radiate a magnetic field? The compass will not operate properly inside or around items that radiate a magnetic field like metal buildings or cars.
3. Is the eTrex Summit using the GPS to provide heading information? Press and hold the **PAGE** key to reactivate the Electronic Compass.

### **Satellite Reception Tips**

If the eTrex Summit has problems receiving satellite signals, you will be prompted to answer some questions.

#### **Reception Tips**



*Clouds and weather do not affect the operation of the eTrex Summit!*

**'AUTOLOCATE'** forces the eTrex Summit to search for any available satellite(s) to determine its (your) location.

#### **A. If you are using the eTrex Summit indoors:**

The message 'TROUBLE TRACKING SATELLITES. ARE YOU INDOORS NOW?' appears. Press the **UP** or **DOWN** button to highlight 'YES'. Press **ENTER**. The message disappears.

#### **OR:**

Go outside. The eTrex Summit will keep tracking.

#### **B. If you are not indoors and you have not moved hundreds of miles/km since you last used your eTrex Summit:**

1. The message 'TROUBLE TRACKING SATELLITES. ARE YOU INDOORS NOW?' will appear. Press the **UP** or **DOWN** button to highlight 'NO'. Press **ENTER**.
2. eTrex Summit then asks: 'HAVE YOU MOVED HUNDREDS OF MILES/KM SINCE LAST USE?'. Press the **UP** or **DOWN** button to highlight 'NO'. Press **ENTER**.
3. eTrex Summit asks: 'IS TODAY dd-mmm-yy?' If you answer 'YES' (the date matches the current date) the unit will continue tracking satellites and switch to the Satellite Page.
4. If you answer NO (the date is incorrect), the eTrex Summit will do an 'AUTOLOCATE' and switch to the Satellite Page.

#### **C. If you are not indoors and you have moved hundreds of miles/km since you last used your eTrex Summit:**

1. The message 'TROUBLE TRACKING SATELLITES. ARE YOU INDOORS NOW?' will appear. Press the **UP** or **DOWN** button to highlight 'NO'. Press **ENTER**.
2. eTrex Summit then asks: 'HAVE YOU MOVED HUNDREDS OF MILES/KM SINCE LAST USE?'. Press the **UP** or **DOWN** button to highlight 'YES'. Press **ENTER**.
3. eTrex Summit performs an "AUTOLOCATE" and switches to the Satellite Page.

## A

Accessories 58, 59  
Activating a Route 34  
Advanced SkyView 13, 14  
Altimeter 7, 40, 52  
Angle 46  
Ascent 7, 24

## B

Backlight 1, 13, 43  
Basic SkyView 3  
Batteries viii, xii  
Battery Cover xii  
Battery Save 51  
Bearing 20  
Bearing Line 15  
Buttons xi

## C

Calibration 2, 40  
Capabilities ix  
Clearing the Track Log 12, 37  
Compass 2, 5, 48, 52, xi  
Contrast 1, 13, 43  
Course 15, 17, 20  
Course Line 15  
Creating a Route 34  
Creating a Waypoint 9, 25, 26

## D

Data Fields  
    Elevation Page 24  
    Pointer Page 18  
    Trip Computer 20  
Daylight Saving Time 42  
Defaults 53  
Delete Waypoint 27, 28, 30  
Deleting a Route 35  
Deleting a Track 38  
Demo Mode 51  
Descent 7, 24  
Destination  
    Final 20  
    Next 20  
Disable/Enable WAAS 56  
Display Page 43  
Distance  
    Final 20  
    Next 20  
Distance/Speed Units 45

## E

Editing a Route 35  
Elevation 7, 9, 26, 29, 38, 40, 45  
Elevation Computer ix  
Elevation Page 7, 21, 22, 23, 24

## ETA

Final 20  
Next 20

## ETE

Final 20  
Next 20

eTrex Summit Description x

## F

FAQs 57  
FCC Compliance iii  
Final  
    ETA 20  
    ETE 20  
Final Destination 20  
Final Distance 20

## G

Getting Started 1  
GOTO 5, 11, 28, 30, 33  
GPS Cleaning viii

## H

Heading 5, 11, 17, 20, 48, 49, 50, 61  
Heading Page 48  
Hunt/Fish 28, 31, ix

# Index

## I

Input/Output Formats 47, 48  
Installing the Batteries xii  
Interface Page 47

## L

Language 53  
Lanyard xii  
LAT/LON 20  
Latitude 9, 26, 29  
Lens Cleaning viii  
Location 20, 26, 29  
Longitude 9, 26, 29

## M

Magnetic North 49  
Maintenance viii  
MapSource 34  
Map Datum 44, 45  
Map Orientation 4, 15  
Map Page 4, 15  
Map Scale 4  
Mark Waypoint 9, 25, 26  
Max Speed 20  
Menu Page 8, 25

# Index

Moving  
Average 20  
Time 20

## N

Next  
Destination 20  
Distance 20  
ETA 20  
ETE 20  
NMEA 47  
North Reference 49, 50

## O

Odometer 6, 18, 20  
Trip 20  
Off Course 20  
Orient Sky 14  
Overall Speed 20

## P

Plot Over Distance 21  
Plot Over Time 21

Pointer Page 5, 11, 16, 17, 18  
Position Format 44  
Pressure 7, 24, 40, 46, 53  
Pressure Trend 7, 51  
Product Registration i  
Projecting a Waypoint 16, 32

## R

Reception Tips 62  
Registration i  
Renaming a Track Log 37  
Renaming a Waypoint 10, 25, 28  
Routes 5, 33, 34, 35, ix  
RTCM 47

## S

Saving the Track Log 36  
Serial Number i  
Setup Display 13, 14  
Setup Page 41-53  
Set Course 17  
Sight 'N Go 16, 17  
SkyView Page 1, 3, 13  
Software License Agreement vii  
Software Version 53  
Specifications 54

Speed 6, 18, 20  
Maximum 18, 20  
Overall 20  
Vertical 20  
Stopped Time 20  
Stop Navigation 17  
Storage viii  
Sun/Moon 28, 31, ix  
Sunrise/Sunset 20, 31  
Switch Back Period 49  
Switch Over Speed 49  
System Page 51, 52, 53

## T

Time 6  
Moving 20  
Of Day 20  
Stopped 20  
Total 20  
Time Format 41  
Time Page 41, 42  
Time Remaining 20  
Time Zone 8, 42  
Total Time 20  
To Course 20  
TracBack 5, 36, 38  
Tracks 36, 37, 38, 39, ix  
Track Log 4, 12, 36  
Track Setup 39  
Trip Computer 6, 19, 20, ix

Trip Time 18, 20  
Troubleshooting 61  
True North 49  
Turn 20

## U

Units Page 43, 44, 45, 46  
UTC Offset 42

## V

Vertical Speed 7, 20, 24, 45

## W

WAAS 51, 56, ix  
Warnings and Cautions iv  
Warranty vi  
Water Immersion viii  
Waypoints 4, 9, 16, 25, 26, 27, 28,  
29, 30, 31, ix  
Waypoint Symbol 9, 25, 28  
What is GPS? 55  
Wiring Diagram 60

## Z

Zoom Distance 22  
Zoom Elevation 22  
Zoom Time 21



**For the latest free software updates (excluding map data) throughout the life of your  
Garmin products, visit the Garmin Web site at [www.garmin.com](http://www.garmin.com).**



© Copyright 2004 Garmin Ltd. or its subsidiaries

Garmin International, Inc.  
1200 East 151<sup>st</sup> Street, Olathe, Kansas 66062, U.S.A.

Garmin (Europe) Ltd.  
Unit 5, The Quadrangle, Abbey Park Industrial Estate, Romsey, SO51 9DL, U.K.

Garmin Corporation  
No. 68, Jangshu 2<sup>nd</sup> Road, Shijr, Taipei County, Taiwan

[www.garmin.com](http://www.garmin.com)

Part Number 190-00396-00 Rev. B